

Adaptateurs filetés mâles ProPEX en EP

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Engineered Polymer
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)

Informations sur le produit et utilisation de l'application

The ProPEX® engineered polymer (EP) male threaded adapter combines durable polymer material with the reliable ASTM F1960 connection professionals have come to depend on for a solution that stands the test of time.

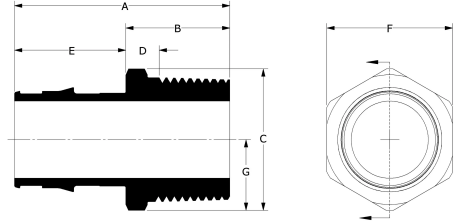

Nom de la pièce	Numéro de pièce	A [Inch]	B [Inch]	C [Inch]	D [Inch]	E [Inch]	F [Inch]	G [Inch]	Cv	Weight per UOM [lbs/UOM]	End Type 1
ProPEX EP Male Threaded Adapter, 1" PEX x 1" NPT	Q4621010	2.5	1.3	1.47	0.422	1.2	1.325	0.735	19.9	0.06	ProPEX 1"
ProPEX EP Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q4625050	1.826	1.1	0.95	0.358	0.726	0.86	0.475	5	0.02	ProPEX 1/2"
ProPEX EP Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q4627575	2.062	1.1	1.18	0.358	0.962	1.06	0.59	11.3	0.03	ProPEX 3/4"

Nom de la pièce	Numéro de pièce	End Type 2
ProPEX EP Male Threaded Adapter, 1" PEX x 1" NPT	Q4621010	MNPT 1"
ProPEX EP Male Threaded Adapter, 1/2" PEX x 1/2" NPT	Q4625050	MNPT 1/2"
ProPEX EP Male Threaded Adapter, 3/4" PEX x 3/4" NPT	Q4627575	MNPT 3/4"

L'installation

Use a minimum of three wraps of PTFE thread-seal tape. If using thread-sealant paste in addition to tape, consult the paste manufacturer for compatibility with polymer fittings. To avoid cross-threading, turn the fitting counterclockwise against the female threads until the threads drop into place. Then, tighten accordingly.

Applications connexes

PEX-a Plumbing Systems
Plumbing Systems
Pre-Insulated Pipe Systems

Les codes	Normes	Annonces
UPC IRC IPC NPC of Canada	ASTM F1960 CSA B137.5 NSF-61 NSF-14 NSF-372 ASTM F877	U.P.Code cNSFus-pw

Notes de bas de page

Coordonnées de la personne-ressource

-	<p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p>	<p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</p>
---	--	--