

ProPEX EP 45 elbows

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:


Technical data

Material	Engineered Polymer
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

Product information and application use

ProPEX® engineered polymer (EP) elbows make 45-degree connections for Uponor crosslinked polyethylene (PEX-a) tubing for use in hot and cold domestic potable water systems, residential fire safety and hydronic radiant heating and cooling systems. Each end of the elbow is manufactured with an Uponor ProPEX fitting for connections to Uponor AquaPEX® or Wirsbo hePEX™ tubing.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

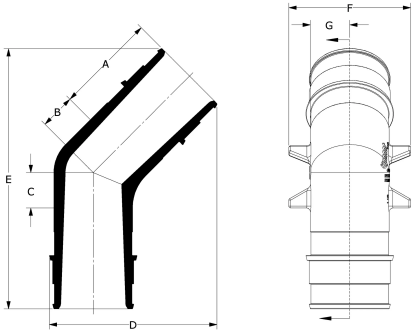

Part name	Part no.	Cv	End Type 1	End Type 2
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010	19.1	ProPEX 1"	ProPEX 1"
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313	29.7	ProPEX 1-1/4"	ProPEX 1-1/4"
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515	33.1	ProPEX 1-1/2"	ProPEX 1-1/2"
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020	68.9	ProPEX 2"	ProPEX 2"
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525	136.8	ProPEX 2-1/2"	ProPEX 2-1/2"
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030	195.5	ProPEX 3"	ProPEX 3"

Part name	Part no.	Codes	Standards	Listings
ProPEX EP 45 elbows	All	IMC UPC IBC IRC IPC NPC of Canada UMC NSPC	ASTM F1960 ASTM E119/UL 263 ASTM E84 ASTM E814/ULC S115 ASTM F877 CSA B137.5 ULC S102.2 ULC S101	IAPMO-ES ICC-ES-PMG cNSFus-pw UL U.P.Code cQAlus P321 HUD MR 1269
In addition, the following parts have additional codes, standards, or listings:				
ProPEX EP 45 Elbow, 1" PEX x 1" PEX	Q4761010		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 1 1/4" PEX x 1 1/4" PEX	Q4761313		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 1 1/2" PEX x 1 1/2" PEX	Q4761515		NSF/ANSI/CAN 61 NSF/ANSI 14	
ProPEX EP 45 Elbow, 2" PEX x 2" PEX	Q4762020		NSF/ANSI/CAN 61 NSF/ANSI 14	
ProPEX EP 45 Elbow, 2 1/2" PEX x 2 1/2" PEX	Q4762525		NSF-61 NSF-14	
ProPEX EP 45 Elbow, 3" PEX x 3" PEX	Q4763030		NSF-61 NSF-14	

Installation

Use the appropriate ProPEX ring for PEX-a tubing. Refer to the Uponor PEX Piping Systems Design and Installation Manual for additional information.

Related applications

- PEX-a Plumbing Systems
- Hydronic Radiant Heating and Cooling Systems
- Turf Conditioning Systems
- Permafrost Prevention Systems
- AquaSAFE™ Fire Safety Systems

Footnotes		Contact information	
-		Uponor Inc.	Uponor Ltd.
		5925 148th Street West	6510 Kennedy Road
		Apple Valley, MN 55124	Mississauga, ON L5T 2X4
		T 800.321.4739	T 888.594.7726
		F 952.891.2008	F 800.638.9517