

# Two-wire thermal actuators for Stainless-steel Manifolds

## Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Technical data

Prop 65 label required? Yes

## Product information and application use

The Uponor Two-wire Thermal Actuators are slow-opening thermal actuators that mount directly onto Uponor manifolds. They provide individual-loop flow control on multi-zoned manifolds.

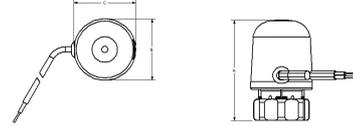

Part name	Part no.	A [inch]	B [inch]	C [inch]	Current draw max. [A]	Operating voltage AC [VAC]	Weight per UOM [lbs/UOM]
Two-wire Thermal Actuator for Stainless-steel Manifolds	A3030524	2.5	1.56	1.56	0.083	24	0.25

Part name	Part no.	Codes	Standards	Listings
Two-wire thermal actuators for Stainless-steel Manifolds	A3030524	-	Class II wiring	-

## Installation

Mount directly onto the manifold. Refer to the manifold installation guide for detailed instructions.

## Related applications

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

## Notes

Time to Open/Close:  
3 to 5 minutes

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517