

Compression wall seal

Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	Rubber
Prop 65 label required?	Yes

Product Information and application use

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping

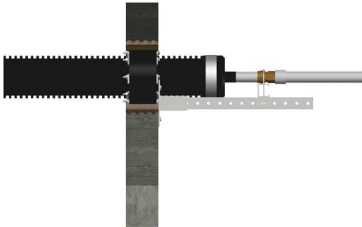

Part name	Part no.	Inner diameter pipe [mm]	Outer diameter pipe [mm]	Subcomponent Material	Weight per UOM [kg/UOM]
Compression Wall Seal for 2.7" Jacket	1007358	70	121	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	1.179
Compression Wall Seal for 5.5" Jacket	1007360	140	200	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	2.313
Compression Wall Seal for 6.9" Jacket	1007361	177	248	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	3.538
Compression Wall Seal for 7.9" Jacket	1007362	202	251	Hardware: Galvanized steel Rubber gasket: (EPDM) rubber	2.767

Installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

Related applications

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

Notes

- Core Drill OD - 4.75"
- Core Drill OD - 8"
- Core Drill OD - 10"

Footnotes

-

Contact information

Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---