

EP branch multi-port tees

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:


Technical data

Material	Engineered Polymer
End type 2	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

Product information and application use

Engineered polymer (EP) branch multi-port tees are used in hot and cold domestic potable water distribution systems. The multi-port tees are available with 3/4" or 1" ProPEX® inlets and 1/2" ProPEX outlets. 1

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

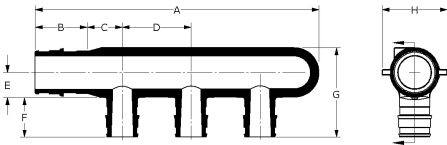

Part name	Part no.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	End Type 1	Weight per UOM [kg/UOM]
3/4" EP Branch Multi-port Tee, 3 (1/2") outlets	Q2237550	112.52	24.26	15.88	31.75	12.19	18.26	41.63	30.99	ProPEX 3/4"	0.045
3/4" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2247550	145.54	24.26	15.88	31.75	12.19	18.26	41.63	30.99	ProPEX 3/4"	0.059
1" EP Branch Multi-port Tee, 4 (1/2") outlets	Q2241050	169.95	30.25	19.69	31.75	15.24	18.26	47.73	37.59	ProPEX 1"	0.077
3/4" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2267550	226.12	24.26	15.88	31.75	11.62	18.26	41.25	29.97	ProPEX 3/4"	0.082
1" EP Branch Multi-port Tee, 6 (1/2") outlets	Q2261050	234.98	30.25	15.88	31.75	14.48	18.26	51.04	36.60	ProPEX 1"	0.113

Part name	Part no.	Codes	Standards	Listings
EP branch multi-port tees	All	UPC IBC IRC IPC NPC of Canada UMC NSPC IMC	ASTM E814 ULC S115 ASTM F877 ASTM F1960 CSA B137.5 ULC S102.2 ASTM E119 UL 263 NSF-61 ULC S101 NSF-14	IAPMO-ES HUD MR 1269 ICC-ES-PMG cNSFus-pw UL U.P.Code cQAlus P321

Installation	Related applications
For a mounting bracket, use any product designed to mount 1" copper pipe for the 3/4" multi-port tee or 1 1/4" copper pipe for the 1" multi-port tee. For more information, refer to the Uponor Piping Systems Installation Guide.	PEX-a Plumbing Systems

Footnotes	Contact information
-	<div>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</div> <div>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</div>