

ProPEX lead-free (LF) brass ice maker valves (angle)

Project Information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

Technical data

End type 1	ProPEX 1/2"
End type 2	Compression 1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

Product Information and application use

Uponor ProPEX® Lead-free (LF) Brass Ice Maker Valve connects 1/2" Uponor AquaPEX® tubing to 1/4" O.D. compression with quarter-turn and shut-off capability.1

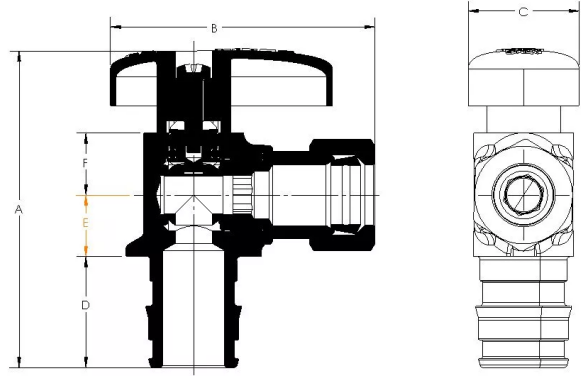

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Ice Maker Valve, 1/2" PEX x 1/4" O.D. (angle)	LF4785025	2.146	2.044	0.8	0.709	0.4	0.4	0.3

Installation

Install valves according to local building code. Do not dismantle. Refer to the Uponor Professional Plumbing Installation Guide for additional information.

Related applications

PEX-a Plumbing Systems

Codes

UPC|IPC|NPC of Canada|NSPC

Standards

ASTM F1960|CSA B125|CSA B137.5|NSF-61|NSF-372|ASME A112.18.1|ASTM F877

Listings

cCSAus

Trademark information

ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.636.9517