


## Uponor Aqua Pipe natural PN10 25x3,5 50m

1001202

- Operating pressure 10 bar
- Coil

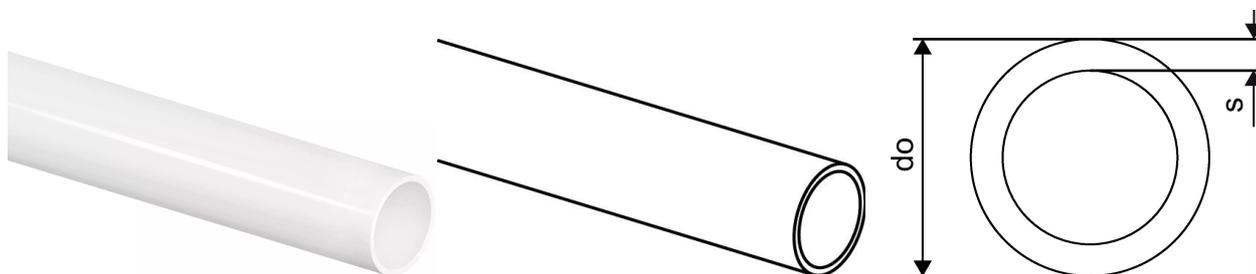

### Application information Uponor Aqua Pipe natural PN10

#### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN10 25x3,5 50m

1001202



### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 7321500031701  |
| Item no GF   | 35001001202    |
| Item no GTIN | 07321500031701 |
| Item no VVS  | 087210025      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 25    |
| Item Unit Length | 1000  |
| Item Unit Weight | 0,236 |
| Item Unit Width  | 25    |
| Item_UOM         | m     |

### Measurements

|                   |     |
|-------------------|-----|
| Outer Diameter_do | 25  |
| Wall thickness_s  | 3,5 |

### Packaging

|                        |                |
|------------------------|----------------|
| Packaging GTIN PL1     | 06414905250677 |
| Packaging GTIN PL4     | 06414905250691 |
| Packaging Height PL1   | 132            |
| Packaging Height PL4   | 950            |
| Packaging Length PL1   | 780            |
| Packaging Length PL4   | 1200           |
| Packaging Quantity PL1 | 50             |
| Packaging Quantity PL4 | 400            |
| Packaging Type PL1     | Base_Box       |
| Packaging Type PL4     | Pallet         |
| Packaging Volume PL1   | 0,0803088      |
| Packaging Volume PL4   | 0,912          |
| Packaging Weight PL1   | 13             |

|                      |       |
|----------------------|-------|
| Packaging Weight PL4 | 119,4 |
| Packaging Width PL1  | 780   |
| Packaging Width PL4  | 800   |

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)