


Uponor Radi Pipe natural PN6 S 40x3,7 6m

1008939

- Operating pressure 6 bar
- 6 m bars

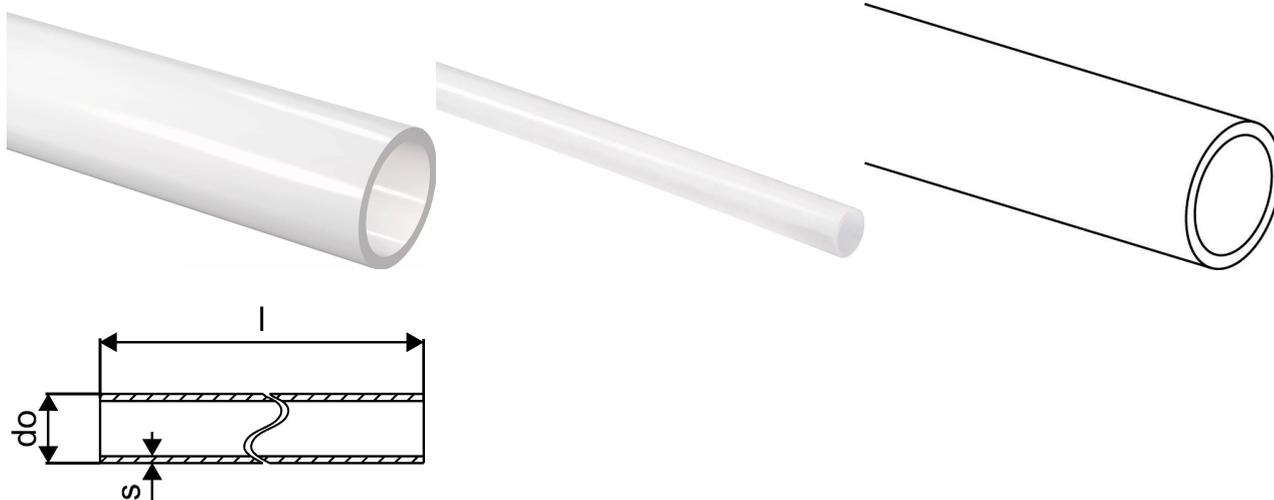

Application information Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 40x3,7 6m

1008939

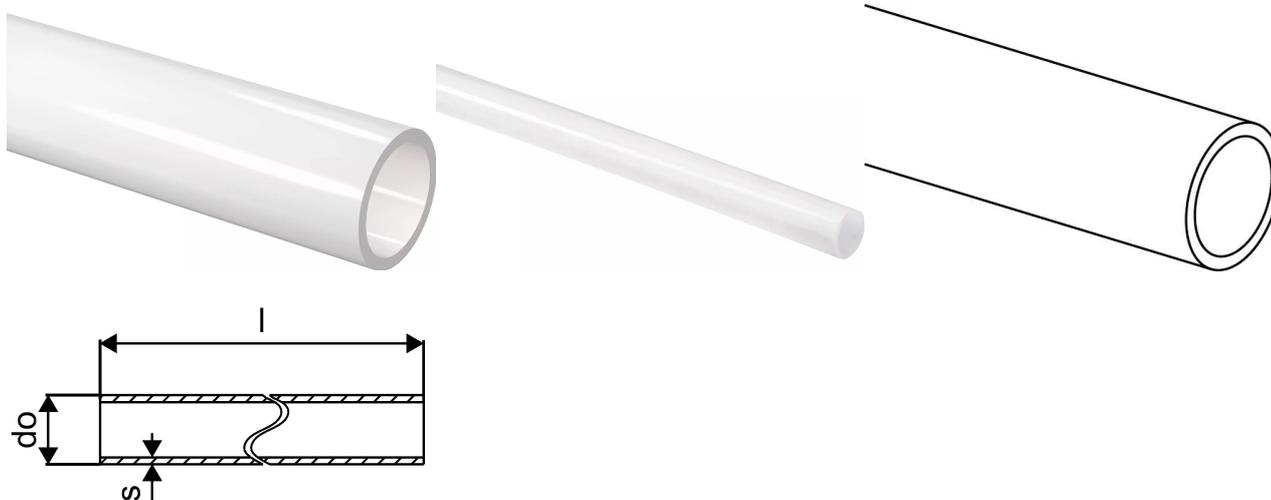

Product code

| | |
|--------------|----------------|
| Item no EAN | 7321500018061 |
| Item no GF | 35001008939 |
| Item no GTIN | 07321500018061 |
| Item no NRF | 8362379 |
| Item no RSK | 2418232 |
| Item no VVS | 087229140 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 40 |
| Item Unit Length | 1000 |
| Item Unit Weight | 0,437 |
| Item Unit Width | 40 |
| Item_UOM | m |

Measurements

| | |
|-------------------|-----|
| Outer Diameter_do | 40 |
| Wall thickness_s | 3,7 |

Packaging

| | |
|----------------------|----------------|
| Packaging GTIN PL1 | 06414905422012 |
| Packaging GTIN PL4 | 06414905662852 |
| Packaging Height PL1 | 40 |
| Packaging Height PL4 | 700 |
| Packaging Length PL1 | 6000 |
| Packaging Length PL4 | 6100 |

| | |
|------------------------|-------------|
| Packaging Quantity PL1 | 6 |
| Packaging Quantity PL4 | 840 |
| Packaging Type PL1 | Plastic_Bag |
| Packaging Type PL4 | Wooden_Cage |
| Packaging Volume PL1 | 0,0096 |
| Packaging Volume PL4 | 2,7755 |
| Packaging Weight PL1 | 2,436 |
| Packaging Weight PL4 | 364,246 |
| Packaging Width PL1 | 40 |
| Packaging Width PL4 | 650 |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com