


Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

- Operating pressure 6 bar
- 6 m bars

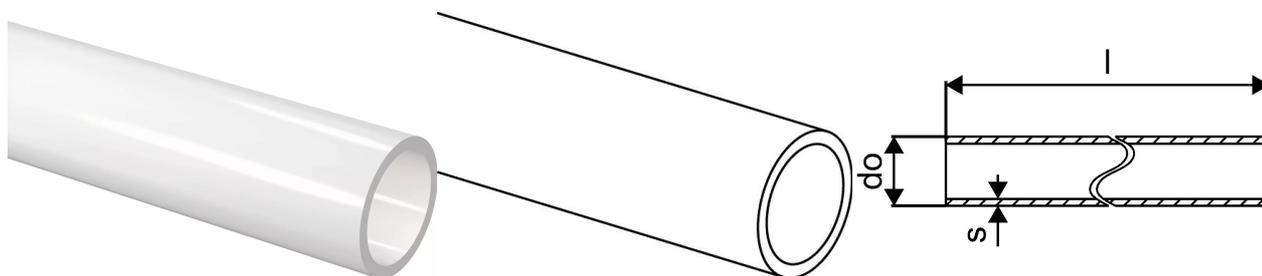

Application information Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

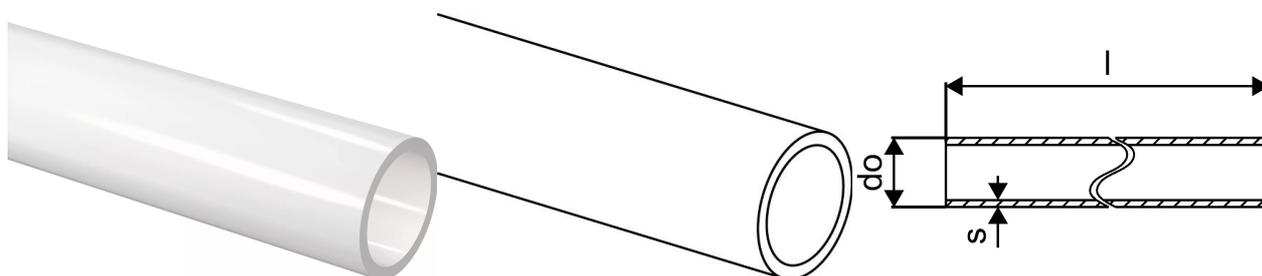

Product code

Item no EAN	7321500018085
Item no GF	35001008941
Item no GTIN	07321500018085
Item no RSK	2418235
Item no VVS	087229163

Dimensions

Item Unit Height	63
Item Unit Length	1000
Item Unit Weight	1,048
Item Unit Width	63
Item_UOM	m

Measurements

Outer Diameter_do	63
Wall thickness_s	5,8

Packaging

Packaging GTIN PL1	06414905422036
Packaging GTIN PL4	06414905662876
Packaging Height PL1	65
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	420
Packaging Type PL1	Piece
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,02535
Packaging Volume PL4	2,7755

Packaging Weight PL1	6,288
Packaging Weight PL4	250
Packaging Width PL1	65
Packaging Width PL4	650

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com