


## Uponor MLC white S 50x4,5 5m

1013449

- bar
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

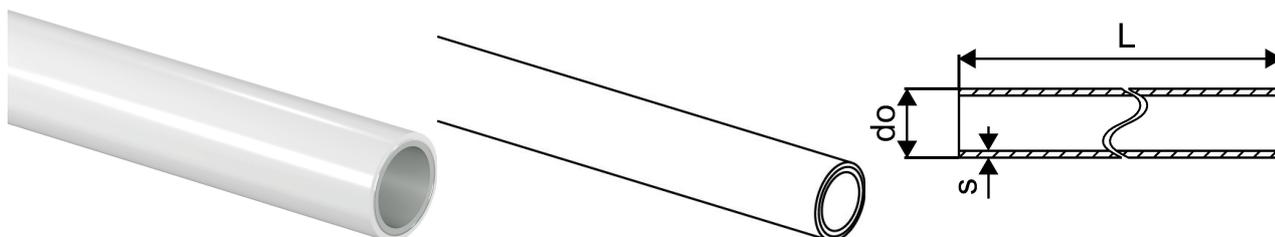

### Application information Uponor MLC white S

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according to EN 806.

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor MLC white S 50x4,5 5m

1013449

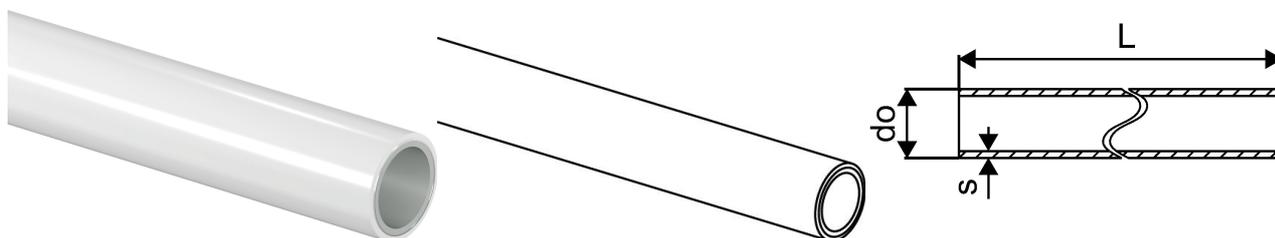

### Product code

Item no EAN	4021598005587
Item no GF	35001013449
Item no GTIN	04021598005587
Item no LVI	1720108
Item no NOBB	41940042
Item no NRF	5071345
Item no RSK	1873322
Item no VVS	087306150

### Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,744
Item Unit Width	50
Item_UOM	m

### Measurements

Outer Diameter_do	50
Wall thickness_s	4,5

### Packaging

Packaging GTIN PL1	06414905256976
Packaging GTIN PL2	06414905256983
Packaging GTIN PL4	06414905256990
Packaging Height PL1	50
Packaging Height PL2	140
Packaging Height PL4	760
Packaging Length PL1	5000
Packaging Length PL2	5070
Packaging Length PL4	5080

Packaging Quantity PL1	5
Packaging Quantity PL2	20
Packaging Quantity PL4	660
Packaging Type PL1	Piece
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,0125
Packaging Volume PL2	0,099372
Packaging Volume PL4	4,43992
Packaging Weight PL1	3,72
Packaging Weight PL2	22
Packaging Weight PL4	770
Packaging Width PL1	50
Packaging Width PL2	140
Packaging Width PL4	1150

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)