


Uponor Ecoflex Aqua Pipe Single 63x8,6/175

1018121

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing

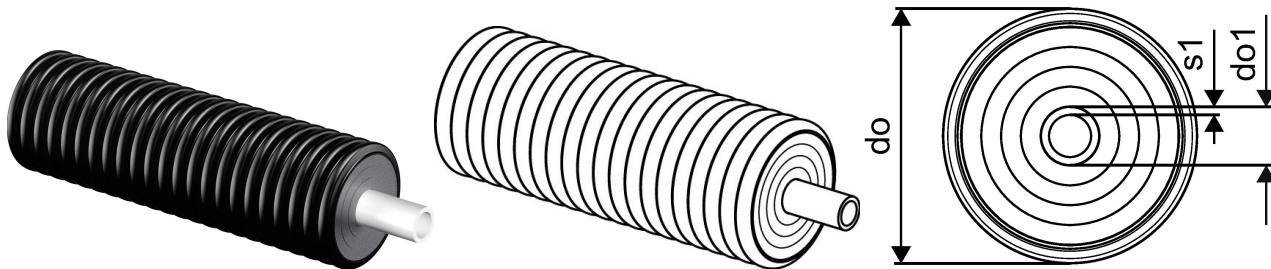

Application information Uponor Ecoflex Aqua Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Pipe Single 63x8,6/175

1018121



Measurements

Bending radius M	0,65
Outer Diameter_do	175
Outer Diameter_do1	63
Wall thickness_s1	8,6

Product code

Item no EAN	6414905202454
Item no GF	35001018121
Item no GTIN	06414905202454
Item no LVI	3010116
Item no NOBB	41945415
Item no NRF	8360535
Item no RSK	2190568
Item no VVS	087361663

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	3
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437238
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368
Packaging Weight PL1	600

Packaging Width PL1

2400

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com