


Uponor Ecoflex Aqua Twin 25x3,5-25x3,5/175

1018139

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

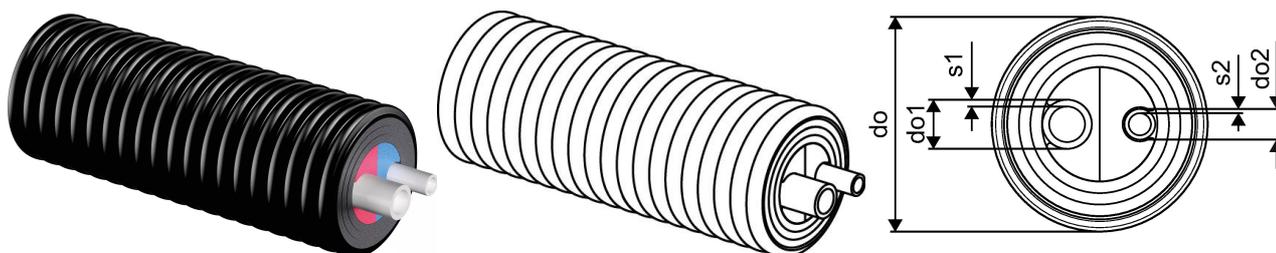

Application information Uponor Ecoflex Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Twin 25x3,5-25x3,5/175

1018139

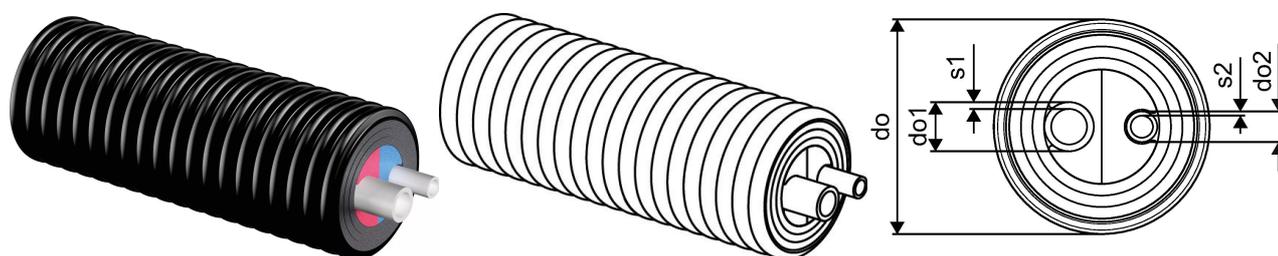

Measurements

Bending radius M	0,65
Outer Diameter_do	175
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	3,5
Wall thickness_s2	3,5

Product code

Item no EAN	4021598111721
Item no GF	35001018139
Item no GTIN	04021598111721
Item no VVS	087363825

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,05
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437412
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368
Packaging Weight PL1	410
Packaging Width PL1	2400

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com