


Uponor RS adapter S-Press 110-RS3

1029128

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

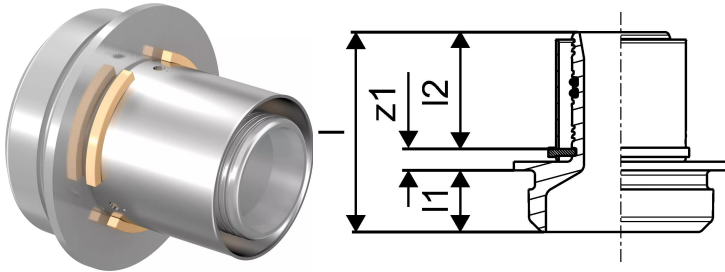

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press 110-RS3

1029128



Product code

Item no EAN	4021598106659
Item no GF	35001029128
Item no GTIN	04021598106659
Item no LVI	1720825
Item no NRF	5071236
Item no RSK	1899490
Item no VVS	045450110

Dimensions

Item Unit Height	120
Item Unit Length	94
Item Unit Weight	1,625
Item Unit Width	120
Item_UOM	pce

Measurements

LENGTH_L	92,6
Length (l1)	20
Length (l2)	62
z1	10,6

Packaging

Packaging GTIN PL1	06414905439386
Packaging GTIN PL4	06414905491292
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00232875
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,725
Packaging Weight PL4	414
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com