


Uponor RS adapter female thread Rp2 1/2"FT-RS2

1029136

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

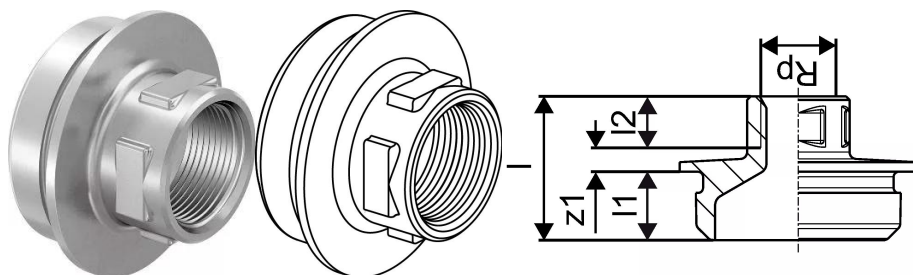

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter female thread Rp2 1/2"FT-RS2
1029136

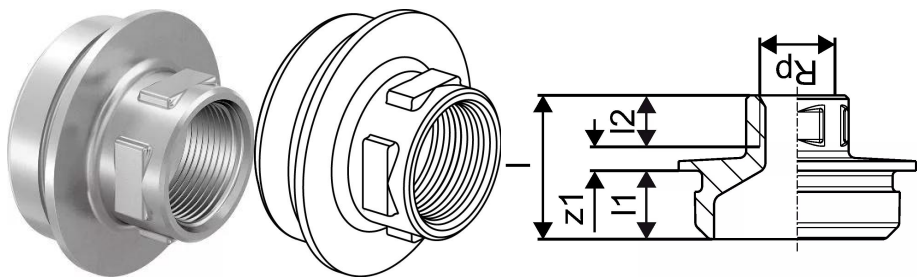

Technical data

Item (unit of measurement)	pce
Item no VVS	045452167
Item no LVI	1720831
Item no NRF	5071243
Female thread Rp	2 1/2 inch
Length (l)	63 mm
Length (l1)	20 mm
Length (l2)	30 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com