


## Uponor S-Press elbow 45deg PPSU 63-63

1032879

- Fast installation with easy bevel and without calibration
- Colour code

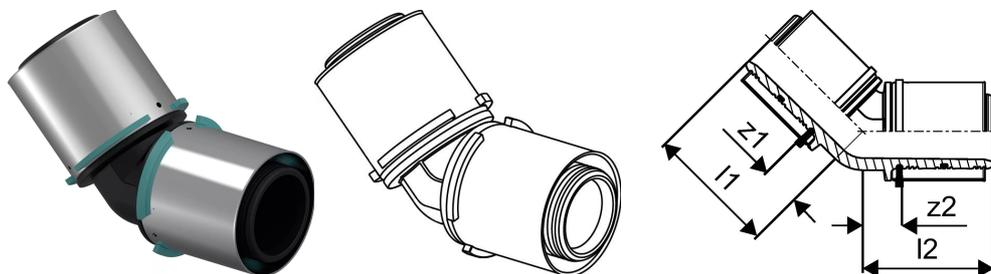

### Application information Uponor S-Press elbow 45deg PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press elbow 45deg PPSU 63-63

1032879

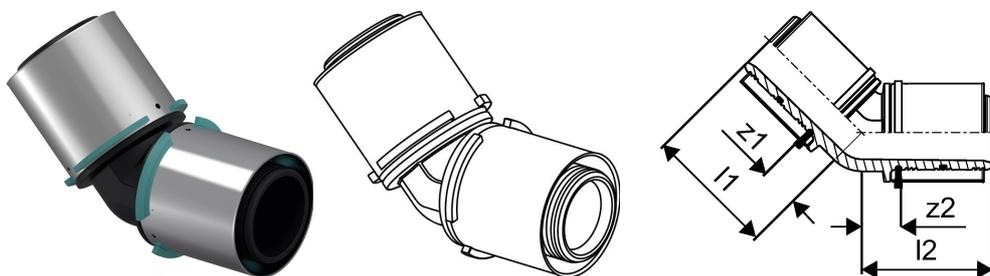

### Technical data

Item (unit of measurement)	pce
Item no VVS	087433163
Item no LVI	1720116
Item no NRF	5114361
Length (l1)	83 mm
Length (l2)	83 mm
Z-measurement z2	23 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	192

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com