


Uponor S-Press reducer PPSU 63-40

1032883

- Fast installation with easy bevel and without calibration
- Colour code

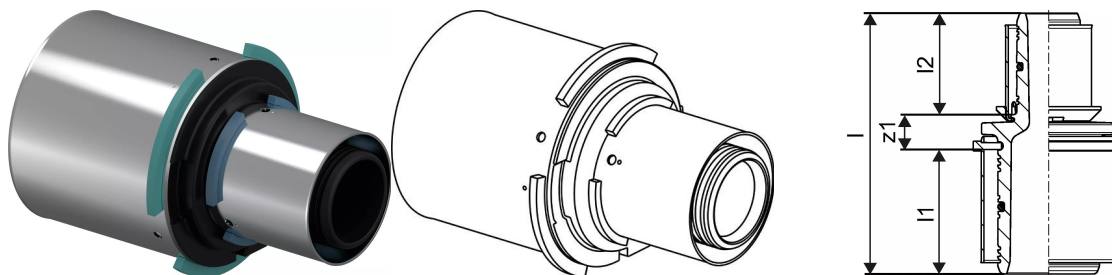

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press reducer PPSU 63-40

1032883

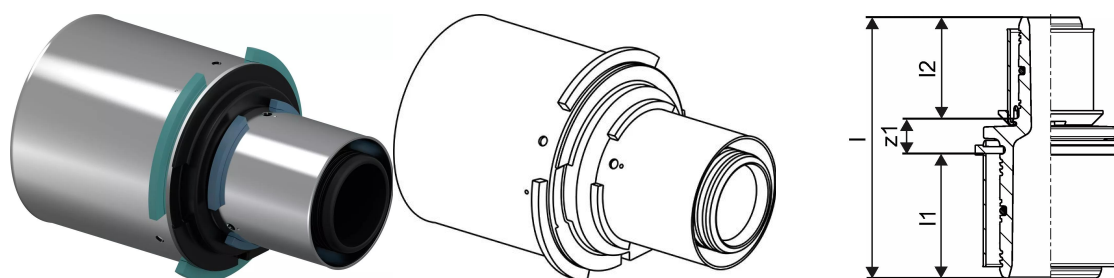

Product code

Item no EAN	6414905220823
Item no GF	35001032883
Item no GTIN	06414905220823
Item no LVI	1720120
Item no NOBB	54939004
Item no NRF	5114365
Item no RSK	1899462
Item no VVS	087454163

Dimensions

Item Unit Height	72
Item Unit Length	115
Item Unit Weight	0,235
Item Unit Width	72
Item_UOM	pce

Measurements

LENGTH_L	114,8
Length (I1)	60,9
Length (I2)	37
z1	16,9

Packaging

Packaging GTIN PL1	06414905281152
Packaging GTIN PL4	06414905281169
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	146
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00142569
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,282
Packaging Weight PL4	133,288
Packaging Width PL1	93
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com