


Uponor RS spacer RS3-RS3 l=210mm

1046478

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.

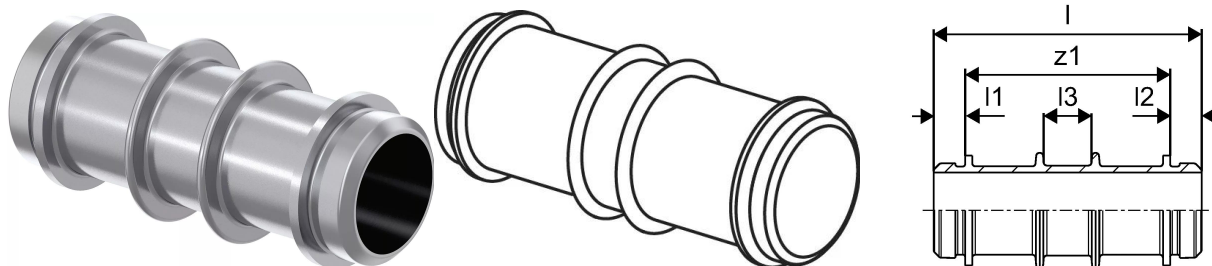

Application information Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS spacer RS3-RS3 l=210mm

1046478

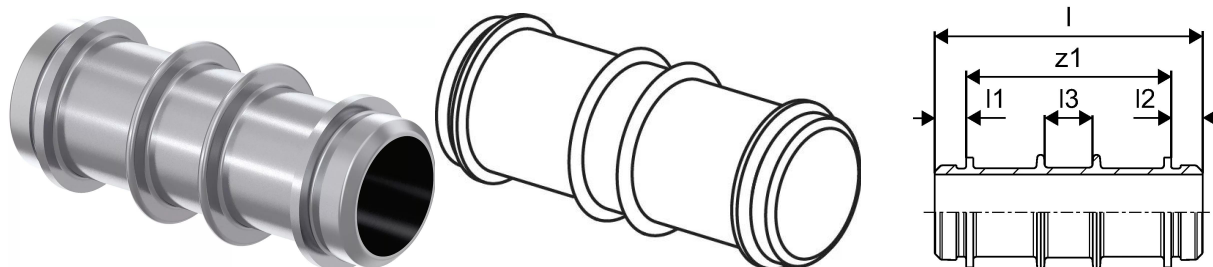

Product code

Item no EAN	4021598111615
Item no GF	35001046478
Item no GTIN	04021598111615
Item no LVI	1720635
Item no NRF	5079084
Item no RSK	1877797
Item no VVS	045458325

Dimensions

Item Unit Height	255
Item Unit Length	105
Item Unit Weight	2,717
Item Unit Width	105
Item_UOM	pce

Measurements

LENGTH_L	250
Length (l1)	20
Length (l2)	20
Length (l3)	30
z1	210

Packaging

Packaging GTIN PL1	06414905460229
Packaging GTIN PL4	06414905493265
Packaging Height PL1	131
Packaging Height PL4	800
Packaging Length PL1	285
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	96
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004890885
Packaging Volume PL4	0,768
Packaging Weight PL1	2,87
Packaging Weight PL4	285,832
Packaging Width PL1	131
Packaging Width PL4	800

Documents

[Page with all documents](#)

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com