


Uponor S-Press adapter male thread 50-R1 1/2"MT

1046905

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

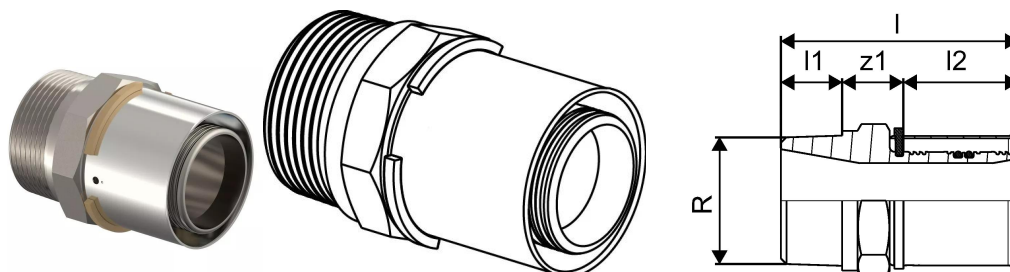

Application information Uponor S-Press adapter male thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press adapter male thread 50-R1 1/2"MT
1046905

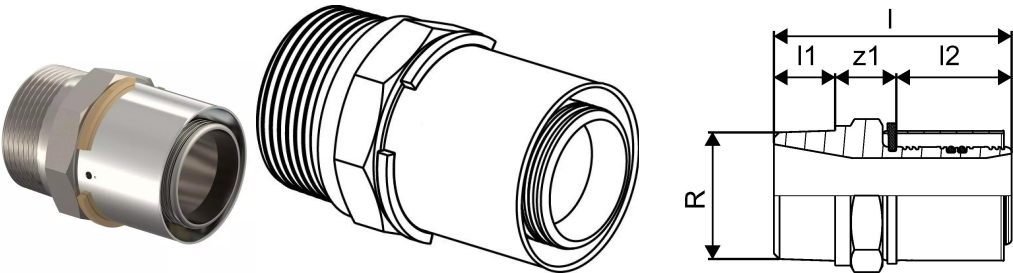

Technical data

Item (unit of measurement)	pce
Item no VVS	045481445
Length (l)	80 mm
Length (l1)	20 mm
Length (l2)	38 mm
Z-measurement d	50 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	1152

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com