


Uponor S-Press tee reducer 50-25-40

1046924

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

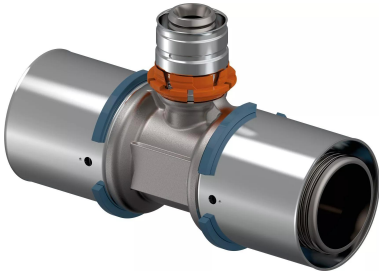

Application information Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- if not different mentioned:
Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press tee reducer 50-25-40

1046924

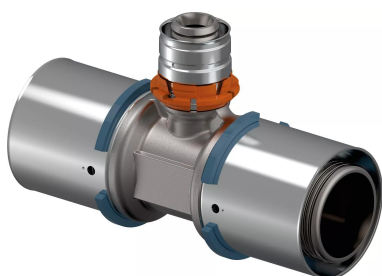

Technical data

Item (unit of measurement)	pce
Item no VVS	045476436
Length (l1)	61 mm
Length (l2)	65 mm
Length (l3)	61 mm
Z-measurement z2	35 mm
Z-measurement z3	23 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	300

Documents

[Page with all documents](#)

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com