


## Uponor Uni Pipe PLUS white S 25x2,5 5m

1059574

- bar
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

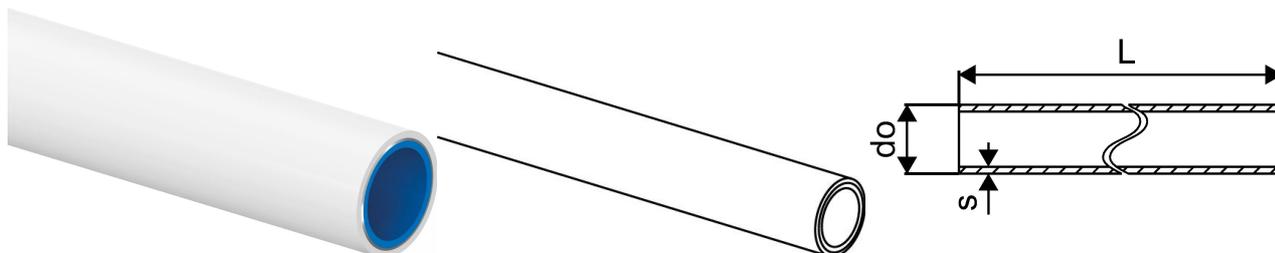

### Application information Uponor Uni Pipe PLUS white S

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

#### Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor Uni Pipe PLUS white S 25x2,5 5m

1059574

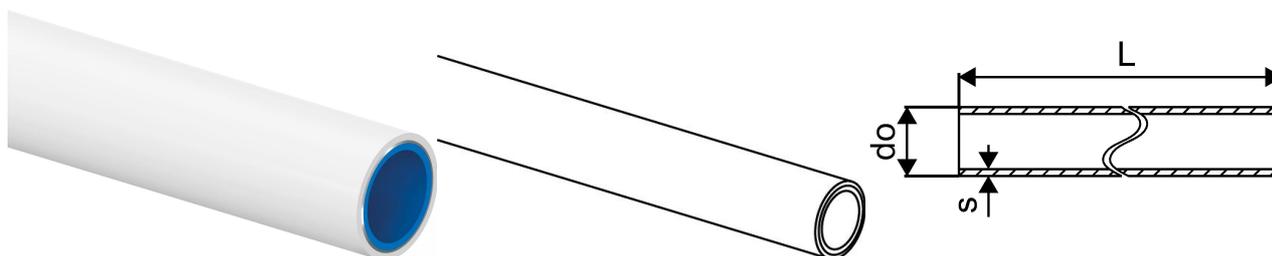

### Product code

Item no EAN	4021598121225
Item no GF	35001059574
Item no GTIN	04021598121225
Item no LVI	1720135
Item no NOBB	48165645
Item no NRF	5072099
Item no RSK	2004934
Item no VVS	087480125

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,264
Item Unit Width	25
Item_UOM	m

### Measurements

Length	5
Outer Diameter_do	25
Wall thickness_s	2,5

### Packaging

Packaging GTIN PL1	06414905412020
Packaging GTIN PL2	06414905635344
Packaging GTIN PL4	06414905635559
Packaging Height PL1	25
Packaging Height PL2	110
Packaging Height PL4	725
Packaging Length PL1	5000
Packaging Length PL2	5080

Packaging Length PL4	5080
Packaging Quantity PL1	5
Packaging Quantity PL2	50
Packaging Quantity PL4	2550
Packaging Type PL1	Piece
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,003125
Packaging Volume PL2	0,061468
Packaging Volume PL4	4,23545
Packaging Weight PL1	1,32
Packaging Weight PL2	20,66
Packaging Weight PL4	1054
Packaging Width PL1	25
Packaging Width PL2	110
Packaging Width PL4	1150

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)