


Uponor Uni Pipe PLUS white 16x2,0 100m

1059576

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

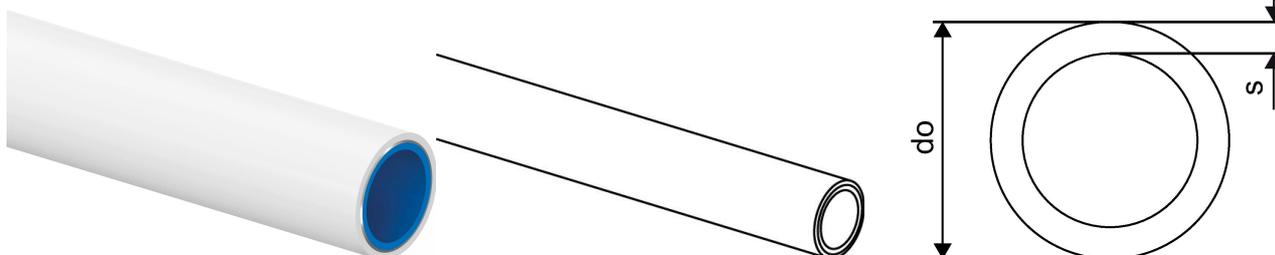

Application information Uponor Uni Pipe PLUS white

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application



- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor Uni Pipe PLUS white 16x2,0 100m

1059576

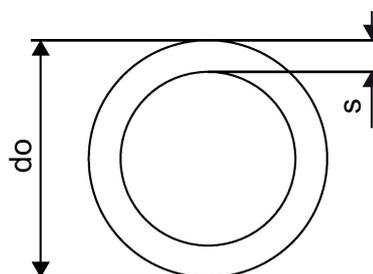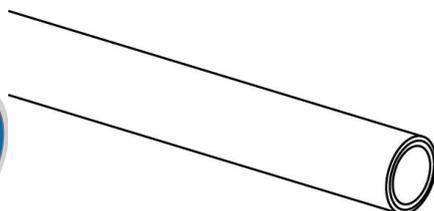

Product code

Item no EAN	4021598121249
Item no GF	35001059576
Item no GTIN	04021598121249
Item no LVI	1720137
Item no NOBB	48167223
Item no NRF	5072088
Item no RSK	2004921
Item no VVS	087480516

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,117
Item Unit Width	16
Item_UOM	m

Measurements

Length	100
Outer Diameter_do	16
Wall thickness_s	2,0

Packaging

Packaging GTIN PL1	06414905412082
Packaging GTIN PL4	06414905412099
Packaging Height PL1	130
Packaging Height PL4	2000
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	100
Packaging Quantity PL4	2000

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,079092
Packaging Volume PL4	1,92
Packaging Weight PL1	12,816
Packaging Weight PL4	281,32
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com