
Product data sheet



GF Uponor Uni Pipe PLUS white 16x2,0 500m

1059578

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

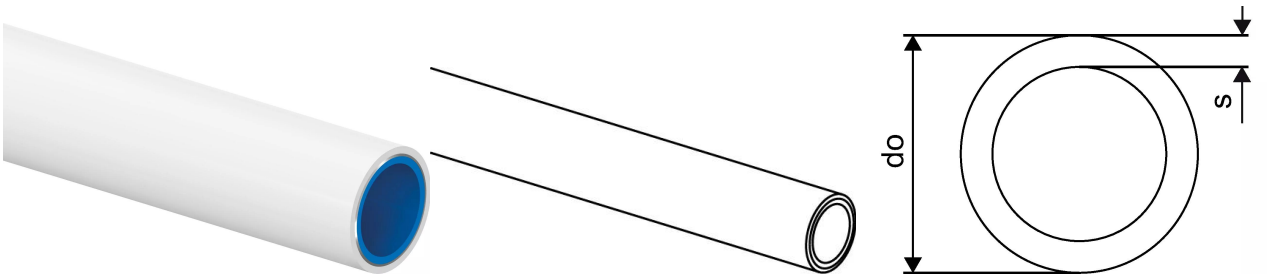

Application information GF Uponor Uni Pipe PLUS white

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white 16x2,0 500m

1059578

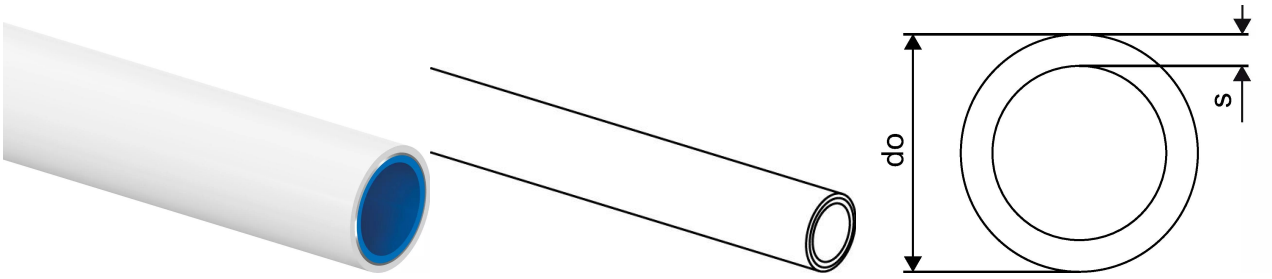

Product code

Item no EAN	4021598121263
Item no GF	35001059578
Item no GTIN	04021598121263
Item no LVI	1720139
Item no NOBB	48167242
Item no NRF	5072091

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,117
Item Unit Width	16
Item_UOM	m

Measurements

Length	500
Outer Diameter_do	16
Wall thickness_s	2

Packaging

Packaging GTIN PL1	06414905412129
Packaging GTIN PL4	06414905412136
Packaging Height PL1	256
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1150
Packaging Quantity PL1	500
Packaging Quantity PL4	3500

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3326976
Packaging Volume PL4	2,645
Packaging Weight PL1	59,085
Packaging Weight PL4	423,5
Packaging Width PL1	1140
Packaging Width PL4	1150

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+