


## Uponor S-Press PLUS adapter male thread 16-R1/2"MT

1070502

- Made of tin-plated DR brass

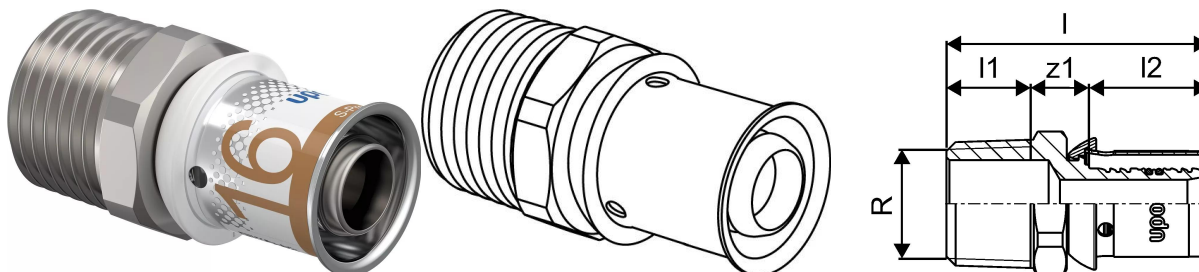

### Application information Uponor S-Press PLUS adapter male thread

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS adapter male thread 16-R1/2"MT

1070502

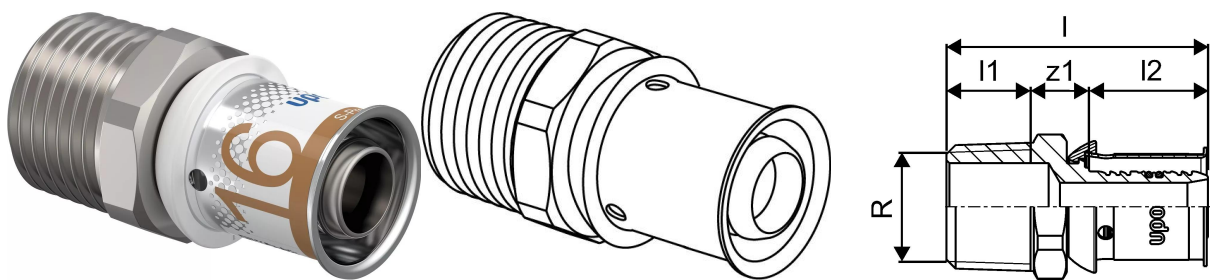

Technical data

Item (unit of measurement)	pce
Item no VVS	045481189
Item no LVI	1720171
Item no NRF	5114427
Length (l)	44 mm
Length (l1)	14 mm
Length (l2)	20 mm
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com