Product data sheet





GF Uponor S-Press PLUS adapter male thread MT 16-R3/4"

1070503

- Made of tin-plated DR brass (lead-free)



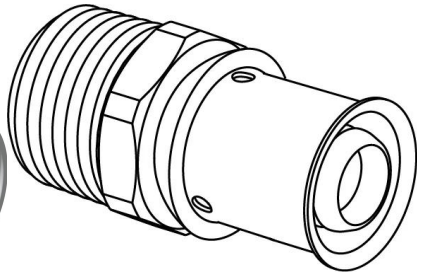



Application information GF Uponor S-Press PLUS adapter male thread MT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS adapter male thread MT 16-R3/4"

1070503

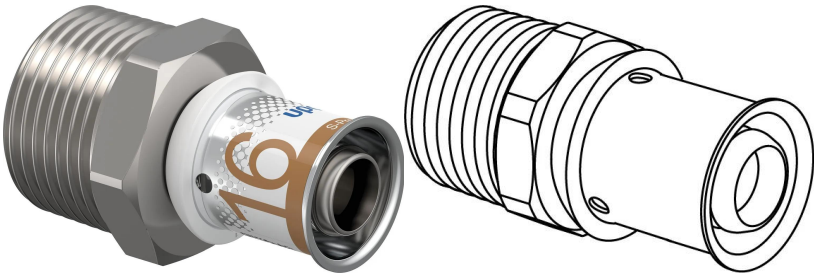



Product code

Item no EAN	6414905218233
Item no GF	35001070503
Item no GTIN	06414905218233
Item no LVI	1720173
Item no NOBB	55171775
Item no NRF	5114428
Item no RSK	1899412
Item no VVS	045481195

Dimensions

Item Unit Height	30.5
Item Unit Length	46
Item Unit Weight	0,062
Item Unit Width	27
Item_UOM	pce

Measurements

LENGTH_L	46
Length (l1)	15,5
Length (l2)	19,8
Male_thread_R	3/4
z1	10,7

Packaging

Packaging GTIN PL1	06414905468225
Packaging GTIN PL3	06414905423989
Packaging GTIN PL4	06414905499151
Packaging Height PL1	89

Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	15
Packaging Quantity PL3	120
Packaging Quantity PL4	5760
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	1,18
Packaging Weight PL3	9,57
Packaging Weight PL4	483,36
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+