


Uponor S-Press PLUS elbow male thread 20-R3/4"MT

1070534

- Made of tin-plated DR brass

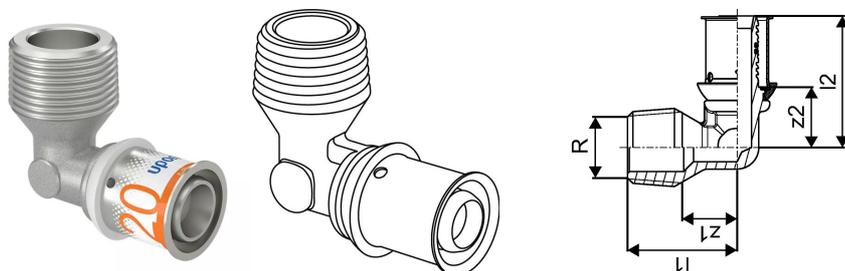

Application information Uponor S-Press PLUS elbow male thread

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS elbow male thread 20-R3/4"MT

1070534

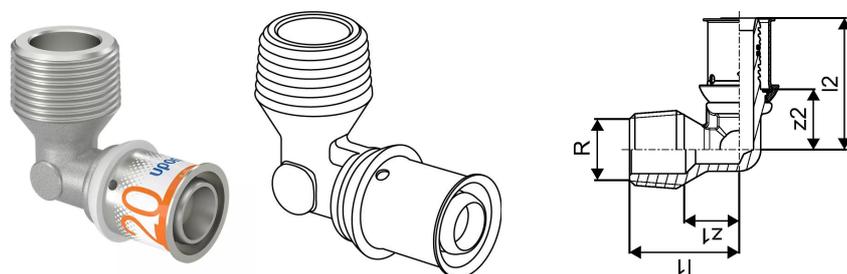

Product code

Item no EAN	6414905218547
Item no GF	35001070534
Item no GTIN	06414905218547
Item no LVI	1720196
Item no NOBB	55172055
Item no NRF	5114462
Item no RSK	1896536
Item no VVS	045471246

Dimensions

Item Unit Height	47
Item Unit Length	54
Item Unit Weight	0,101
Item Unit Width	27
Item_UOM	pce

Measurements

Length (l1)	34,3
Length (l2)	40,5
Male_thread_R	3/4
z1	18
Z2	19,2

Packaging

Packaging GTIN PL1	06414905468454
Packaging GTIN PL3	06414905424238
Packaging GTIN PL4	06414905499380
Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708

Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	1,047
Packaging Weight PL3	8,636
Packaging Weight PL4	433,44
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com