
Product data sheet



GF Uponor S-Press PLUS U-tap elbow mixer MT 16-16-R1/2"

1070636

- Made of tin-plated DR brass (lead-free)
- Fixed stainless steel sleeve
- for inwall mixer and flushing tank connection in serial and loop installation.

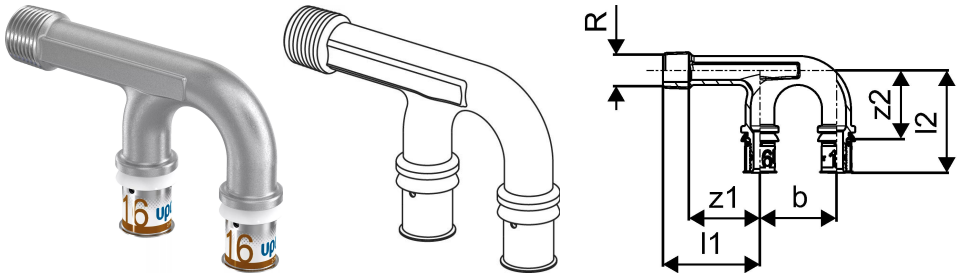

Application information GF Uponor S-Press PLUS U-tap elbow mixer MT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS U-tap elbow mixer MT 16-16-R1/2"

1070636

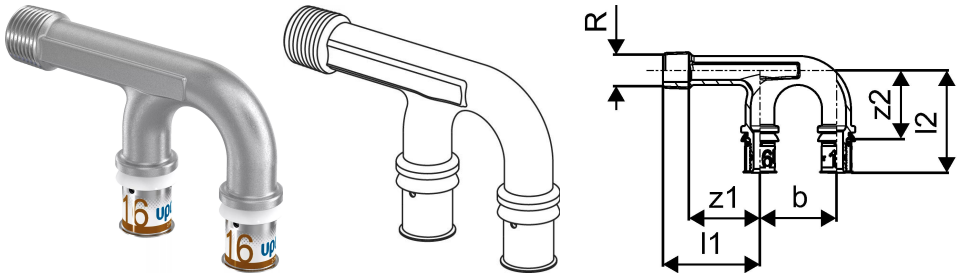

Product code

Item no EAN	6414905219520
Item no GF	35001070636
Item no GTIN	06414905219520

Dimensions

Item Unit Height	22
Item Unit Length	113
Item Unit Weight	0,237
Item Unit Width	70.7
Item_UOM	pce

Measurements

Length (l1)	57
Length (l2)	60
Male_thread_R	1/2
Z Measurement b	45
z1	41,5
Z2	40,2

Packaging

Packaging GTIN PL1	06414905468928
Packaging GTIN PL4	06414905499854
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,265
Packaging Weight PL4	266,88
Packaging Width PL1	135
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+