


Uponor S-PRESS PLUS tap elbow twin 90deg 20-Rp1/2"FT-20

1070649

- Made of tin-plated DR brass
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.
- Thread acc. to EN ISO 228-1

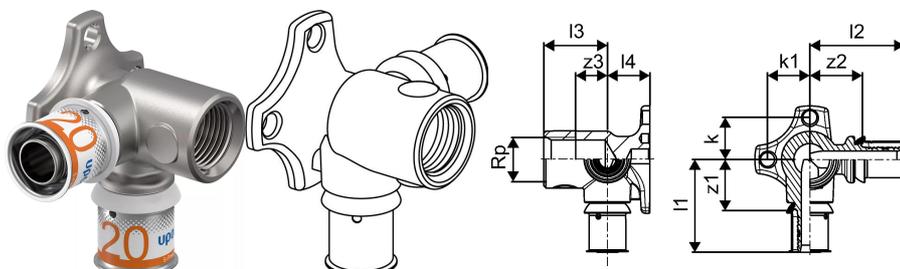

Application information Uponor S-PRESS PLUS tap elbow twin 90deg

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-PRESS PLUS tap elbow twin 90deg 20-Rp1/2"FT-20

1070649

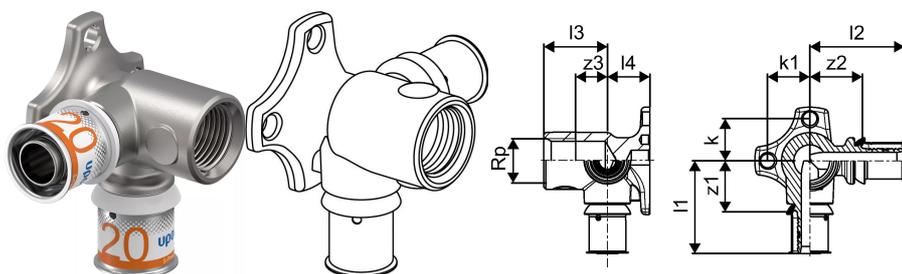

Measurements

Female thread Rp	0,5
Length (l1)	45,5
Length (l2)	46
Length (l3)	30
Z Measurement k	20
Z Measurement k1	20
z1	24,2
Z2	24,7
Z3	15

Product code

Item no EAN	6414905219650
Item no GF	35001070649
Item no GTIN	06414905219650
Item no NOBB	55172880
Item no NRF	5114558

Dimensions

Item Unit Height	50
Item Unit Length	72
Item Unit Weight	0,237
Item Unit Width	71
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905279845
Packaging GTIN PL3	06414905425013
Packaging GTIN PL4	06414905279869
Packaging Height PL1	85
Packaging Height PL3	182

Packaging Height PL4	666
Packaging Length PL1	165
Packaging Length PL3	275
Packaging Length PL4	800
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0018513
Packaging Volume PL3	0,00885885
Packaging Volume PL4	0,63936
Packaging Weight PL1	2,38
Packaging Weight PL3	9,558
Packaging Weight PL4	478,784
Packaging Width PL1	132
Packaging Width PL3	177
Packaging Width PL4	1200

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com