


Uponor S-Press PLUS tap elbow LWC 16-Rp1/2"FT I=35

1070654

- Incl. twist-proof attachment and sound protection
- For lead-through through walls.

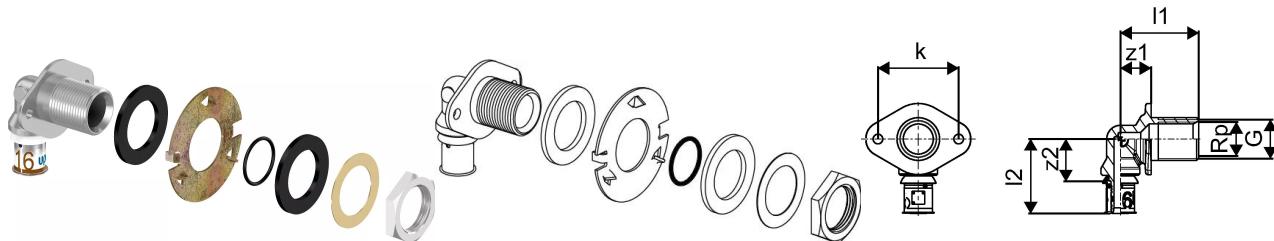

Application information Uponor S-Press PLUS tap elbow LWC

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
E.g.
 - DVGW
 - AENOR

Uponor S-Press PLUS tap elbow LWC 16-Rp1/2"FT I=35 1070654

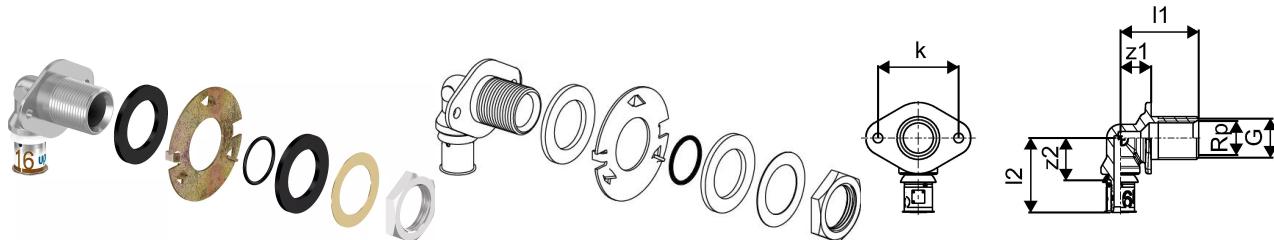

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com