


## Uponor S-Press PLUS tap elbow LWC 16-Rp1/2"FT l=35

**1070654**

- Incl. twist-proof attachment and sound protection
- For lead-through through walls.

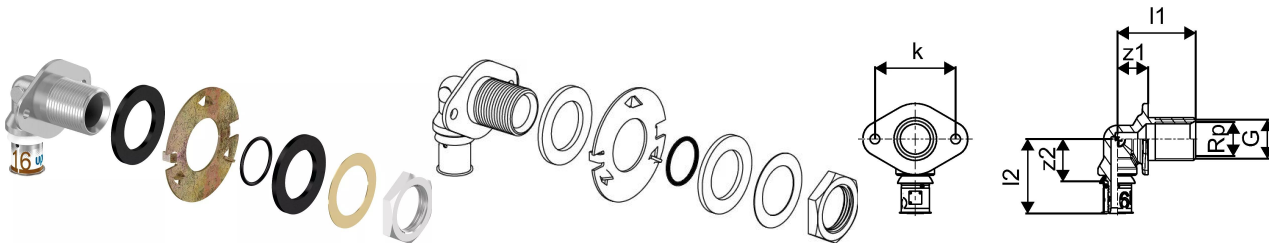

### Application information Uponor S-Press PLUS tap elbow LWC

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

Uponor S-Press PLUS tap elbow LWC 16-Rp1/2"FT l=35

1070654

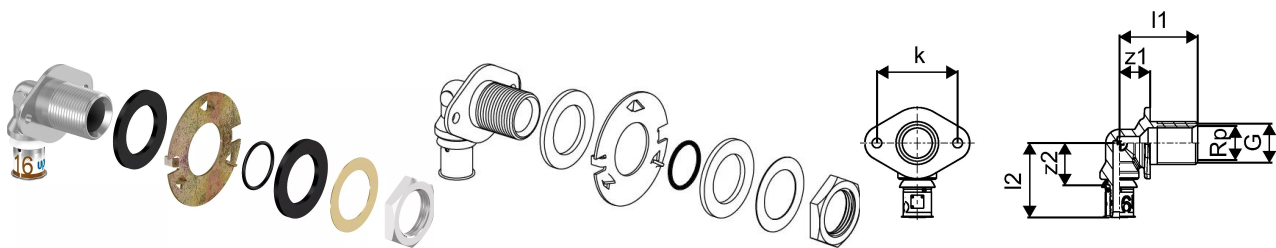

Technical data

Item (unit of measurement)	pce
Female thread Rp	1/2 inch
Length (l1)	59 mm
Length (l2)	46 mm
Z-measurement k	50 mm
Z-measurement g	NaN mm
Z-measurement z2	26 mm
Packaging Quantity PL1	1
Packaging Quantity PL2	5
Packaging Quantity PL4	960

Documents

Page with all documents

Download icon

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com