


Uponor S-Press PLUS radi tee adapter plated 16-15CU-16 l=350mm

1070681

- With cranked copper pipe 15 x 1 mm, plated
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

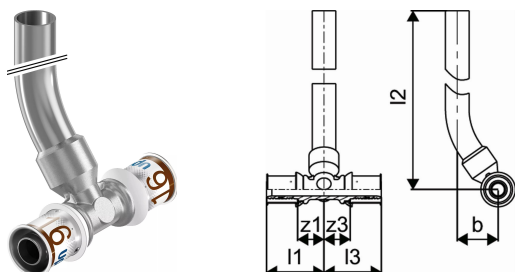

Application information Uponor S-Press PLUS radi tee adapter plated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS radi tee adapter plated 16-15CU-16 l=350mm

1070681

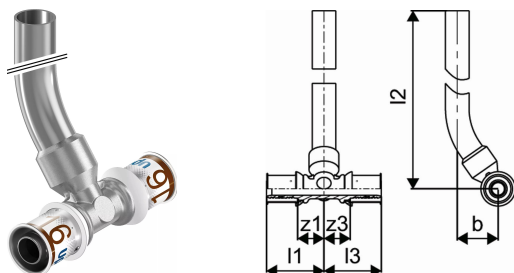

Technical data

Item (unit of measurement)	pce
Item no VVS	404730116
Length (l1)	38 mm
Length (l2)	351 mm
Length (l3)	38 mm
Z-measurement b	26 mm
Z-measurement z3	18 mm
Packaging Quantity PL1	20
Packaging Quantity PL4	600

Documents

[Page with all documents](#)

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com