


## Uponor Thermatop M 1750X277mm

### 1090935

- Emitter made of 16 x 2,0 mm Uni Pipe PLUS with 10 pipe rows and up to 37,3 m per m<sup>2</sup> module.
- For grid distances of CD-profiles of 333mm
- The pipe is 100% diffusion-resistant according to DIN 4726.
- Cooling capacity according to EN 14240 (8K) up to 67 W/m<sup>2</sup>
- Heating capacity according to EN 14037 (15K) up to 105 W/m<sup>2</sup>.
- Sound absorption according to DIN EN ISO 354 with  $\alpha_w$  between 0,60 to 0,65.
- Capacity and acoustic values depending on gypsum board.

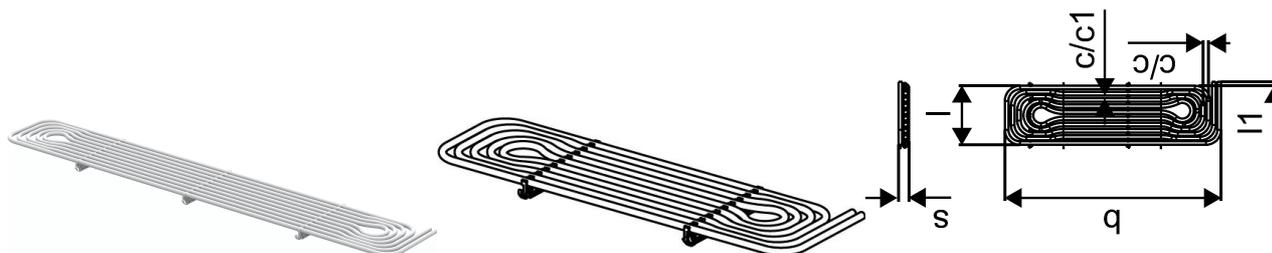

## Application information Uponor Thermatop M

### Specification


- Water-based radiant ceiling heating and cooling system
- Prefabricated ceiling emitters for dry construction
- Tool-free installation into CD ceiling profiles
- Designed for low-temperature heating and efficient cooling

### Application

- Radiant ceiling heating and cooling in commercial and public buildings
- Use in offices, schools, healthcare buildings and large open spaces
- Integration into suspended plasterboard ceiling systems
- Heating and cooling with one water-based solution

## Uponor Thermatop M 1750X277mm

1090935

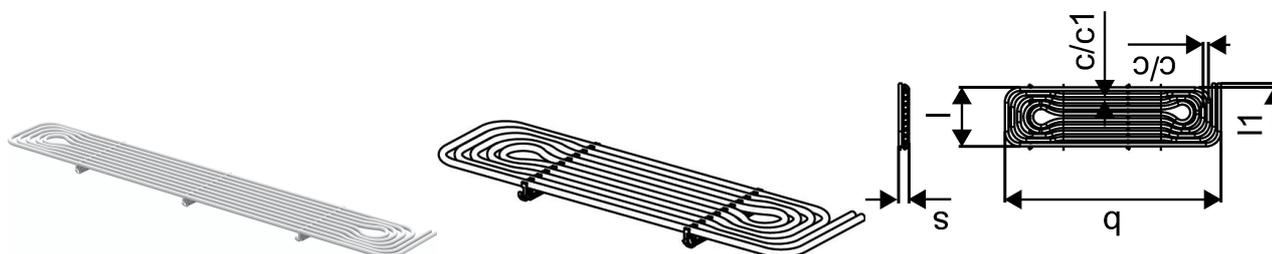

### Measurements

Distance center center 1	27,7
Distance center center	24,3
LENGTH_L	277
Length (l1)	17,4
Wall thickness_s	47
Z Measurement b	1750

### Product code

Item no EAN	6414905222001
Item no GF	35001090935
Item no GTIN	06414905222001

### Dimensions

Item Unit Height	39
Item Unit Length	1750
Item Unit Weight	2,15
Item Unit Width	277
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905269297
Packaging GTIN PL4	06414905277131
Packaging Height PL1	310
Packaging Height PL4	1700
Packaging Length PL1	1790
Packaging Length PL4	1790
Packaging Quantity PL1	10
Packaging Quantity PL4	200
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,16647
Packaging Volume PL4	3,6516
Packaging Weight PL1	21,6
Packaging Weight PL4	459,3
Packaging Width PL1	300
Packaging Width PL4	1200

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)