


Uponor RS adapter S-Press PLUS 20-RS2

1095818

- tin plated
- made of DR material
- press without bevel

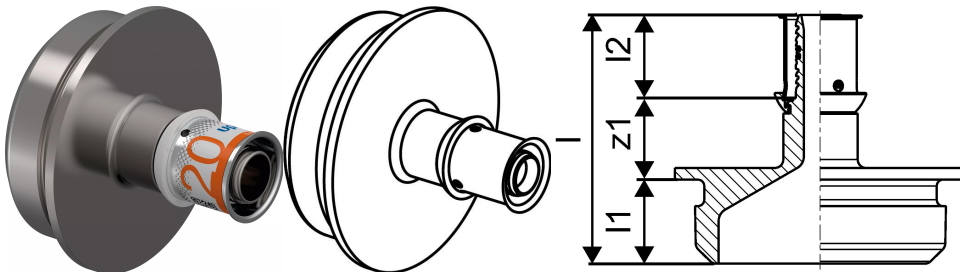

Application information Uponor RS adapter S-Press PLUS

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press PLUS 20-RS2

1095818



Product code

Item no EAN	6414905480111
Item no GF	35001095818
Item no GTIN	06414905480111
Item no LVI	1720835
Item no NRF	5071315
Item no RSK	1899573
Item no VVS	045450320

Dimensions

Item Unit Height	70
Item Unit Length	61
Item Unit Weight	0,326
Item Unit Width	70
Item_UOM	pce

Measurements

LENGTH_L	60,9
Length (l1)	20,1
Length (l2)	21,3
z1	19,5

Packaging

Packaging GTIN PL1	06414905481583
Packaging GTIN PL4	06414905555574
Packaging Height PL1	80
Packaging Height PL4	600
Packaging Length PL1	120
Packaging Length PL4	800
Packaging Quantity PL1	1
Packaging Quantity PL4	378

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00096
Packaging Volume PL4	0,576
Packaging Weight PL1	0,383
Packaging Weight PL4	164,774
Packaging Width PL1	100
Packaging Width PL4	1200

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com