
Product data sheet




GF Uponor S-Press PLUS elbow swivel nut 90° FT 20-G3/4"SN

1105819

- Made of tin-plated DR brass (lead-free)
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

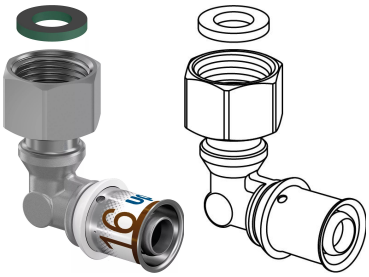



Application information GF Uponor S-Press PLUS elbow swivel nut 90° FT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS elbow swivel nut 90° FT 20-G3/4"SN

1105819

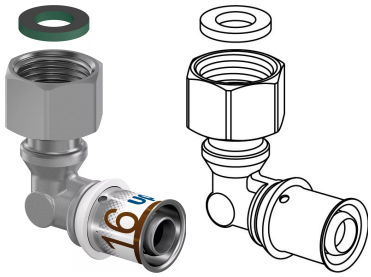



Measurements

Cylindric_thread_G	3/4
Length (l1)	45
Length (l2)	41
z1	37
Z2	19

Product code

Item no EAN	6414905529766
Item no GF	35001105819
Item no GTIN	06414905529766
Item no LVI	1720852
Item no RSK	1896748

Dimensions

Item Unit Height	83
Item Unit Length	86
Item Unit Weight	0,127
Item Unit Width	35
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905560905
Packaging GTIN PL2	06414905560912
Packaging GTIN PL4	06414905560929
Packaging Height PL1	85
Packaging Height PL2	100
Packaging Height PL4	678
Packaging Length PL1	90

Packaging Length PL2	200
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	10
Packaging Quantity PL4	1920
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00026775
Packaging Volume PL2	0,0027
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,137
Packaging Weight PL2	1,47
Packaging Weight PL4	250
Packaging Width PL1	35
Packaging Width PL2	135
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+