


Uponor Ecoflex VIP Thermo Twin 2x25x2,3/140

1118580

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR11
- Max. Load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- VIP+PEX foam, HDPE casing

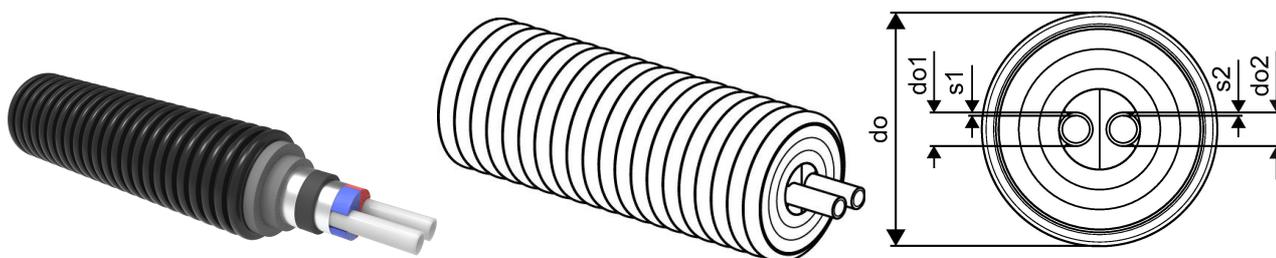

Application information Uponor Ecoflex VIP Thermo Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Twin 2x25x2,3/140

1118580

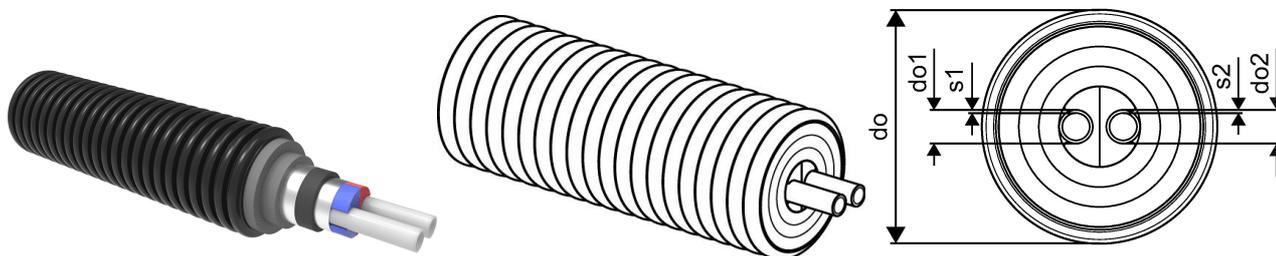

Measurements

Bending radius M	0,4
Outer Diameter_do	140
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	2,3
Wall thickness_s2	2,3

Product code

Item no EAN	6414905519095
Item no GF	35001118580
Item no GTIN	06414905519095
Item no LVI	3010242
Item no NRF	8360957
Item no RSK	2266367
Item no VVS	087808425

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,7
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905552924
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26

Packaging Weight PL1

340

Packaging Width PL1

1500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com