


## Uponor Ecoflex VIP Thermo Twin 2x40x3,7 /175

**1118582**

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR11
- Max. Load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- VIP+PEX foam, HDPE casing

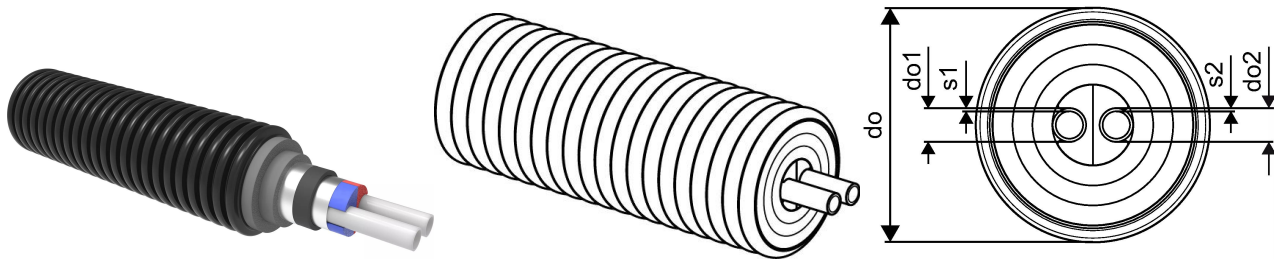

### Application information Uponor Ecoflex VIP Thermo Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Twin 2x40x3,7 /175

1118582

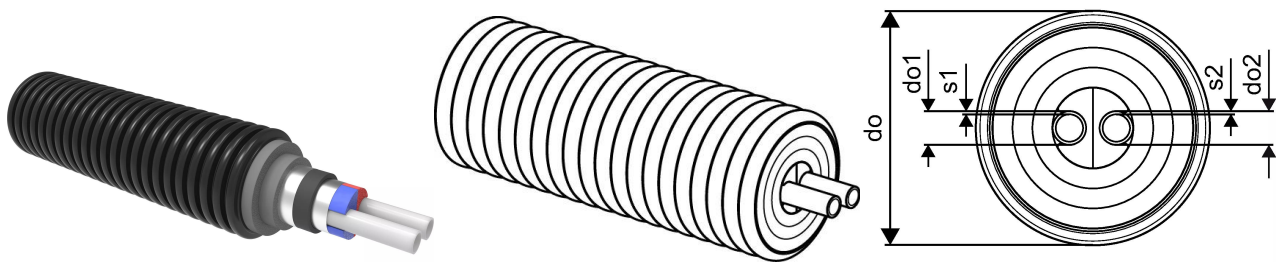

Technical data

Item (unit of measurement)	m
Item no VVS	087808440
Item no LVI	3010244
Item no NRF	8360959
Bending radius 2	0,8 m
Packaging Quantity PL1	200

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com