


Uponor S-Press PLUS mounting angle 80/150mm

1121195

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment

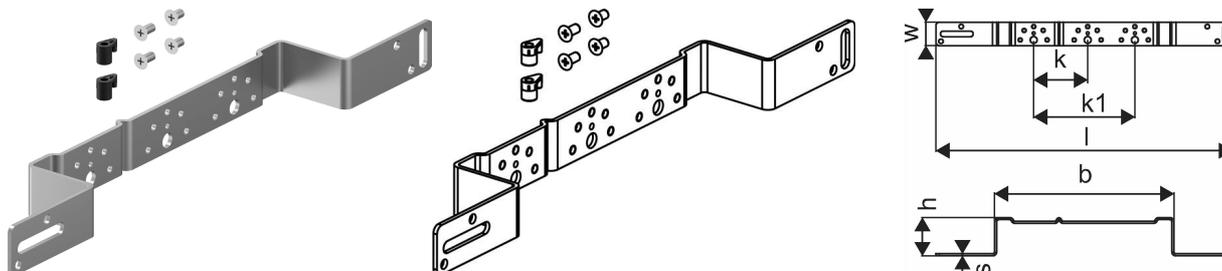

Application information Uponor S-Press PLUS mounting angle

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press PLUS mounting angle 80/150mm

1121195

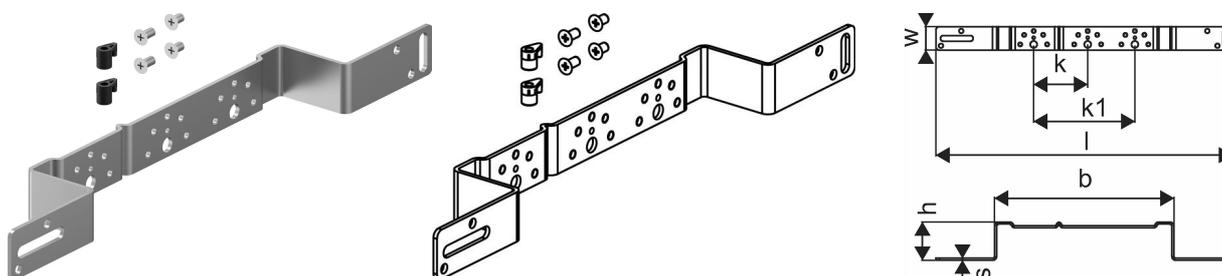

Product code

Item no EAN	6414905641543
Item no GF	35001121195
Item no GTIN	06414905641543

Dimensions

Item Unit Height	57
Item Unit Length	440
Item Unit Weight	0,435
Item Unit Width	35
Item_UOM	pce

Measurements

LENGTH_L	440
Wall thickness_s	3
Z Measurement b	266
Z Measurement h	57
Z Measurement k	80
Z Measurement k1	150
Z Measurement w	35

Packaging

Packaging GTIN PL1	06414900654319
Packaging GTIN PL3	06414905663668
Packaging GTIN PL4	06414905663934
Packaging Height PL1	57
Packaging Height PL3	72
Packaging Height PL4	1090
Packaging Length PL1	440
Packaging Length PL3	477
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Quantity PL4	680
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0008778
Packaging Volume PL3	0,00652536
Packaging Volume PL4	1,0464
Packaging Weight PL1	0,435
Packaging Weight PL3	2,2
Packaging Weight PL4	324
Packaging Width PL1	35
Packaging Width PL3	190
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com