


Uponor Magna manifold segment with valve Euro 2x3/4 Euro

1121533

- For connection with additional segments and basic kit
- Supply-segment with control valves for preadjustment and heating loop connection for G3/4 eurocone
- Return-segment with thermostat upper section incl. cap for locking
- Uponor actuator can be mounted directly on the return
- Heating loop connection for G3/4 eurocone

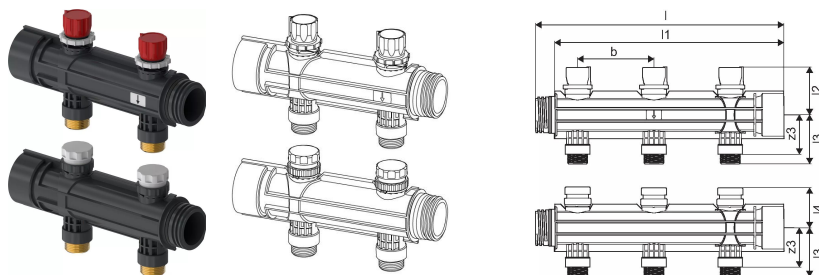

Application information Uponor Magna manifold segment with valve Euro

Specification


- Magna industrial heating system
- Loops 2-5 6-9 10-14 15-19 20
- Bracket 2 3 4 5 6
- Spacing outlet 100 mm

Application

- industrial and commercial large surface heating
- for use inside concrete
- max. 20 loops
- max. pressure: 6 bar at 60°C

Uponor Magna manifold segment with valve Euro 2x3/4 Euro

1121533

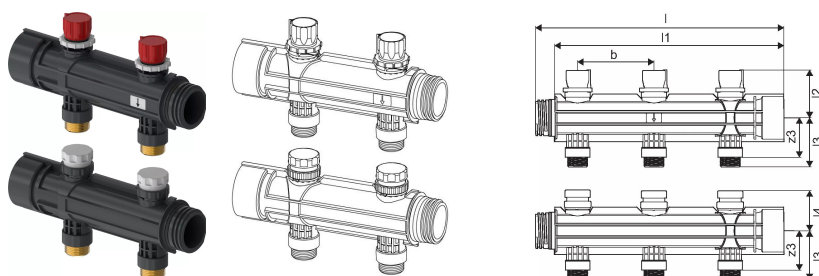

Measurements

Cylindric_thread_G	3/4
LENGTH_L	225
Length (l1)	200
Length (l2)	62
Length (l3)	64
Z Measurement b	100
Z3	51,5

Product code

Item no EAN	6414905660384
Item no GF	35001121533
Item no GTIN	06414905660384
Item no LVI	2022186
Item no NRF	8601851

Dimensions

Item Unit Height	171
Item Unit Length	226
Item Unit Weight	0,744
Item Unit Width	112
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905663118
Packaging GTIN PL4	06414905663392
Packaging Height PL1	175
Packaging Height PL4	900
Packaging Length PL1	235
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004935
Packaging Volume PL4	0,864
Packaging Weight PL1	0,814
Packaging Weight PL4	97,26
Packaging Width PL1	120
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com