


Uponor Radi Pipe natural PN6 S 50x4,6 6m

1008940

- Operating pressure 6 bar
- 6m bars

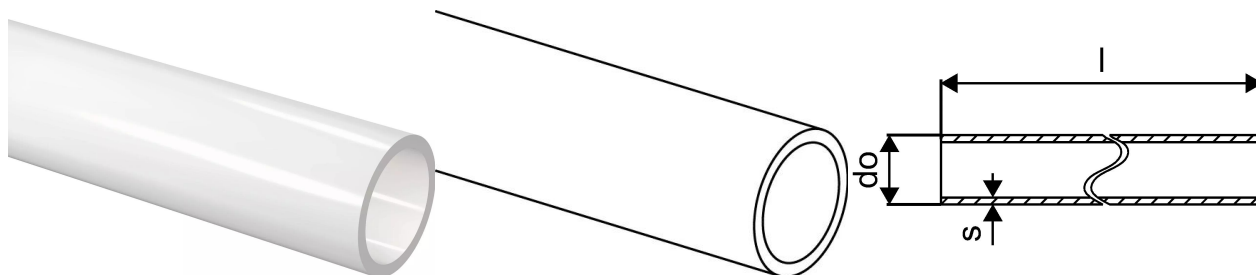

About Uponor Radi Pipe natural PN6 S

Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 50x4,6 6m

1008940



Product code

Item no EAN	7321500018078
Item no GF	35001008940
Item no GTIN	07321500018078
Item no RSK	2418233
Item no VVS	087229150

Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,675
Item Unit Width	50
Item_UOM	m

Measurements

Outer Diameter_do	50
Wall thickness_s	4,6

Packaging

Packaging GTIN PL1	06414905422067
Packaging GTIN PL4	06414905662869
Packaging Height PL1	50
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL4	660
Packaging Type PL1	Piece
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,015
Packaging Volume PL4	2,7755

Packaging Weight PL1	3,99
Packaging Weight PL4	250
Packaging Width PL1	50
Packaging Width PL4	650

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb