


## Uponor Comfort Pipe PLUS 20x2,0 480m

1009231

- UFH pipe made of PE-Xa
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

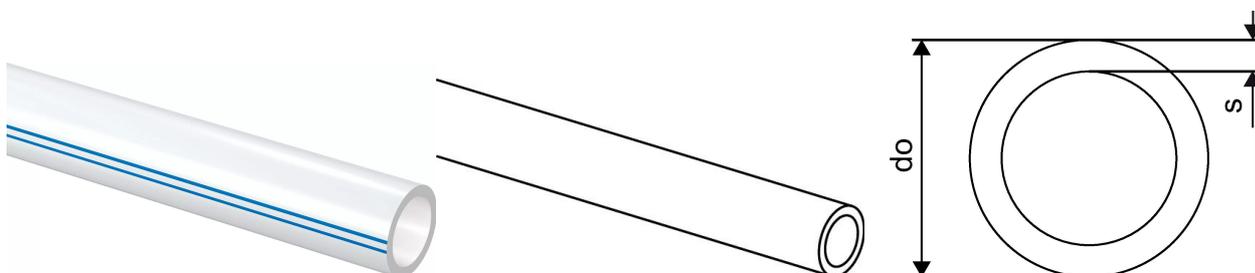

### About Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 20x2,0 480m

1009231

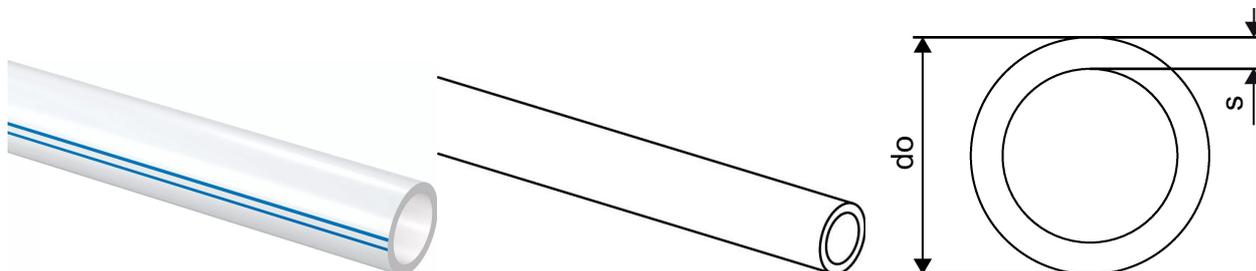

### Product code

Item no EAN	7321500044374
Item no GF	35001009231
Item no GTIN	07321500044374
Item no LVI	2018171
Item no NOBB	41949460
Item no NRF	8361975
Item no RSK	2418243
Item no VVS	087217148

### Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	20
Item_UOM	m

### Measurements

Outer Diameter_do	20
Wall thickness_s	2

### Packaging

Packaging GTIN PL3	06414905256204
Packaging GTIN PL4	06414905256211
Packaging Height PL3	808
Packaging Height PL4	952
Packaging Length PL3	794
Packaging Length PL4	1200
Packaging Quantity PL3	480
Packaging Quantity PL4	960
Packaging Type PL3	Box

Packaging Type PL4	Pallet
Packaging Volume PL3	0,381081888
Packaging Volume PL4	0,91392
Packaging Weight PL3	59,7
Packaging Weight PL4	114,4
Packaging Width PL3	594
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)