


Uponor S-Press PLUS pressure Test Plug O-Ring 16

1013799

- as spare part for pressure testing plug

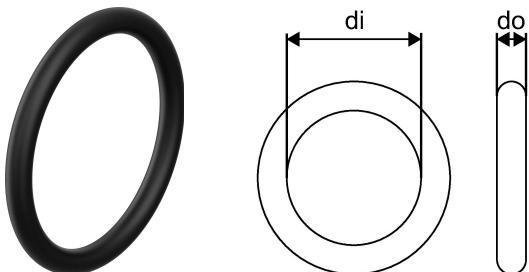

About Uponor S-Press PLUS pressure test plug O-ring

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS pressure Test Plug O-Ring 16 1013799

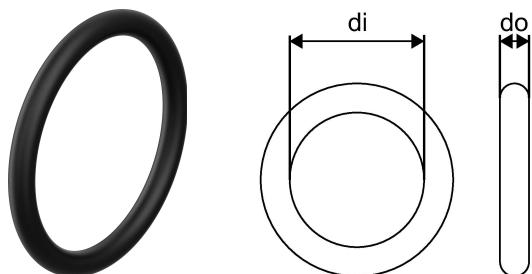

Measurements

Inner_diameter_di	9,1
Outer Diameter_do	1,6

Product code

Item no EAN	4021598501713
Item no GF	35001013799
Item no GTIN	04021598501713
Item no RSK	1897961

Dimensions

Item Unit Height	3
Item Unit Length	12
Item Unit Weight	0,001
Item Unit Width	12
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905435241
Packaging GTIN PL3	06414905445257
Packaging GTIN PL4	06414905488766
Packaging Height PL1	10
Packaging Height PL3	215
Packaging Height PL4	549
Packaging Length PL1	30
Packaging Length PL3	405
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	1000

Packaging Quantity PL4	10000
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000009
Packaging Volume PL3	0,01828575
Packaging Volume PL4	0,52704
Packaging Weight PL1	0,01
Packaging Weight PL3	0,7
Packaging Weight PL4	35
Packaging Width PL1	30
Packaging Width PL3	210
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb