


Uponor S-Press tee reducer 16-14-14

1014912

- Made of tin-plated brass
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code

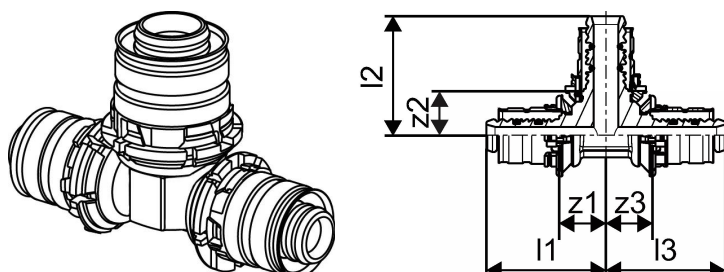

About Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press tee reducer 16-14-14

1014912

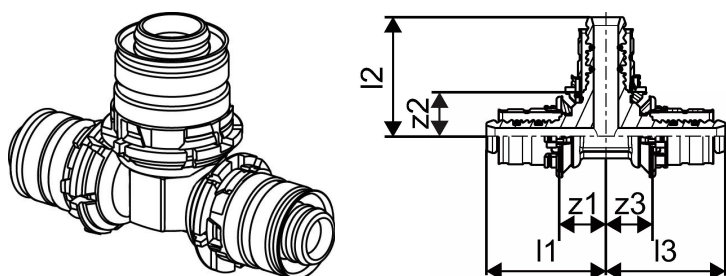

Technical data

Item no EAN	4021598301320
Item no GTIN	04021598301320
Item (unit of measurement)	pce
Length (l1)	35 mm
Length (l2)	35 mm
Length (l3)	35 mm
z2	14 mm
z3	14 mm
Packaging Quantity 1	10
Packaging Quantity 3	80
Packaging Quantity 4	3840
Packaging GTIN PL1	06414905435944
Packaging GTIN PL3	06414905445820
Packaging GTIN PL4	06414905489459
Item Unit Height	20 mm
Item Unit Weight	0,687 kg
Item Unit Width	52 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb