

Uponor Ecoflex Thermo Pipe Single 63x5,8/175

1018113

- Heating and cooling
- One carrier pipe PE-Xa, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing



About Uponor Ecoflex Thermo Pipe Single

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

Uponor Ecoflex Thermo Pipe Single 63x5,8/175

1018113

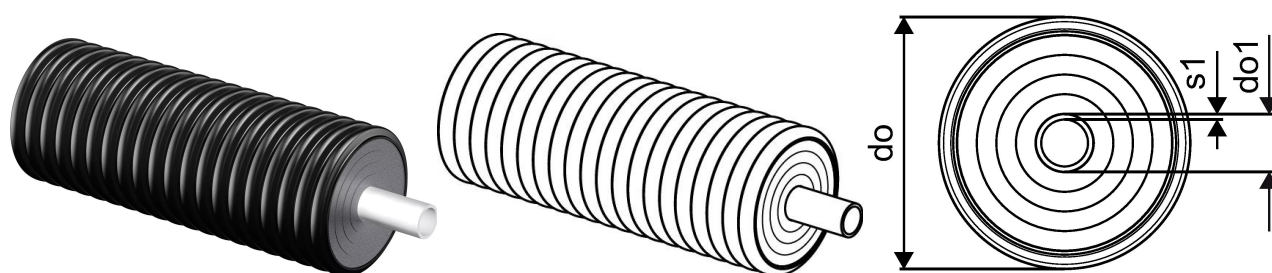

Measurements

Bending radius M	0,55
Outer Diameter_do	175
Outer Diameter_do1	63
Wall thickness_s1	5,8

Product code

Item no EAN	6414905200658
Item no GF	35001018113
Item no GTIN	06414905200658
Item no LVI	3010216
Item no NOBB	41945294
Item no NRF	8360513
Item no RSK	2190560
Item no VVS	087807063

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,56
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437153
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368
Packaging Weight PL1	512

Packaging Width PL1

2400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com