


Uponor Ecoflex Aqua Pipe Single 50x6,9/175

1018120

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- PEX foam, HDPE casing

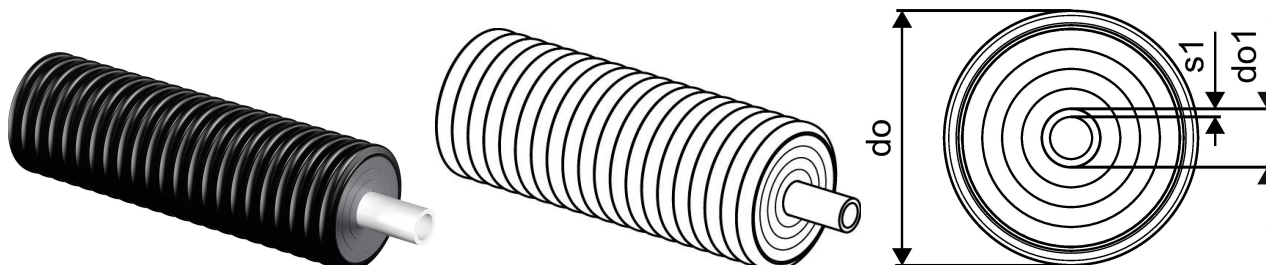

About Uponor Ecoflex Aqua Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural Coloured, PN 10 (SDR 7,4)
- Insulating material: Permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex Aqua Pipe Single 50x6,9/175

1018120

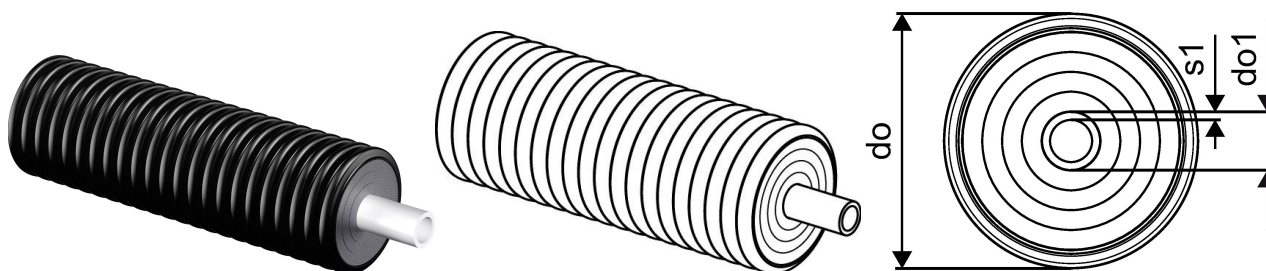

Measurements

Bending radius M	0,55
Outer Diameter_do	175
Outer Diameter_do1	50
Wall thickness_s1	6,9

Product code

Item no EAN	6414905202355
Item no GF	35001018120
Item no GTIN	06414905202355
Item no LVI	3010115
Item no NOBB	41945400
Item no NRF	8360534
Item no RSK	2190567
Item no VVS	087361650

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,54
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437221
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368
Packaging Weight PL1	508

Packaging Width PL1

2400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com