


## Uponor RS elbow 45deg RS3-RS3

1029141

- Made of tin-plated brass
- Base part for RS2 or RS3 adapters or fittings - includes 2 lock pins.

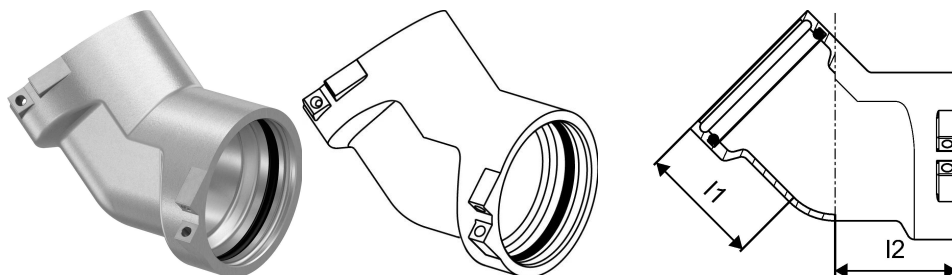

### About Uponor RS elbow 45deg

#### Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


#### Certification

- UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor RS elbow 45deg RS3-RS3

1029141

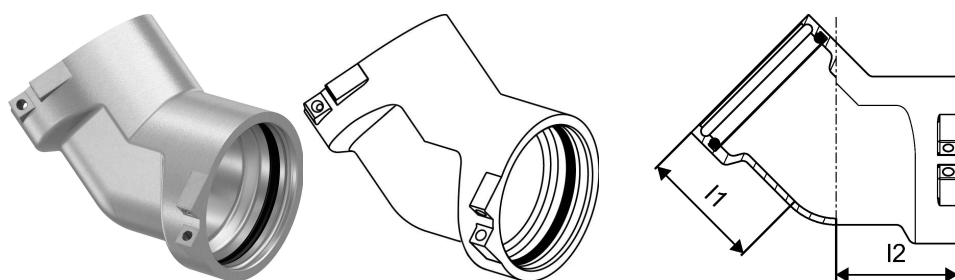

### Product code

Item no EAN	4021598106789
Item no GF	35001029141
Item no GTIN	04021598106789
Item no LVI	1720814
Item no NRF	5071224
Item no RSK	1896581
Item no VVS	045454114

### Dimensions

Item Unit Height	100
Item Unit Length	150
Item Unit Weight	1,93
Item Unit Width	100
Item_UOM	pce

### Measurements

Length (I1)	68
Length (I2)	68

### Packaging

Packaging GTIN PL1	06414905439485
Packaging GTIN PL4	06414905491391
Packaging Height PL1	110
Packaging Height PL4	750
Packaging Length PL1	163
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	175
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,0028688
Packaging Volume PL4	0,72
Packaging Weight PL1	2,042
Packaging Weight PL4	357,35
Packaging Width PL1	160
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)