
Product data sheet




GF Uponor S-Press coupling PPSU 75-75

1032882

- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

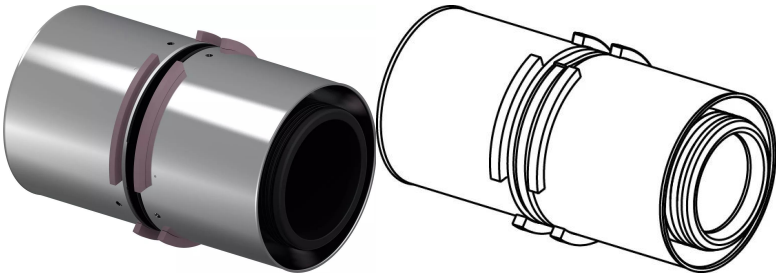



About GF Uponor S-Press coupling PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press coupling PPSU 75-75

1032882

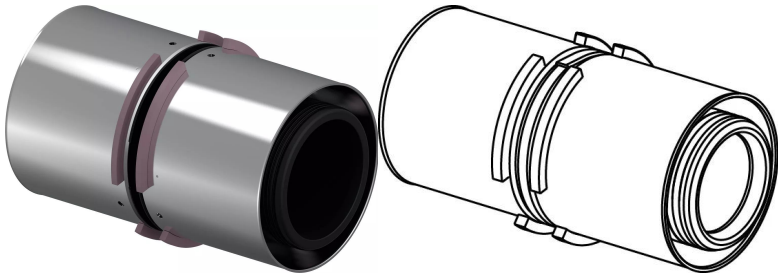

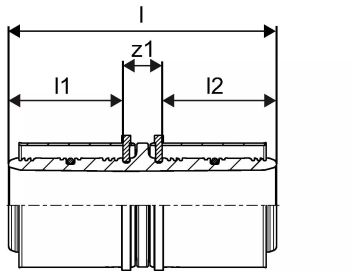

Product code

Item no EAN	6414905220816
Item no GF	35001032882
Item no GTIN	06414905220816
Item no LVI	1720119
Item no NOBB	54938993
Item no NRF	5114364
Item no RSK	1899461
Item no VVS	087452175

Dimensions

Item Unit Height	84
Item Unit Length	137
Item Unit Weight	0,488
Item Unit Width	84
Item_UOM	pce

Measurements

LENGTH_L	137
Length (l1)	60,9
Length (l2)	60,9
z1	14,8

Packaging

Packaging GTIN PL1	06414905281237
Packaging GTIN PL4	06414905281244
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	146

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00142569
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,535
Packaging Weight PL4	230,44
Packaging Width PL1	93
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+