


## Uponor S-Press reducer PPSU 63-50

**1032884**

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

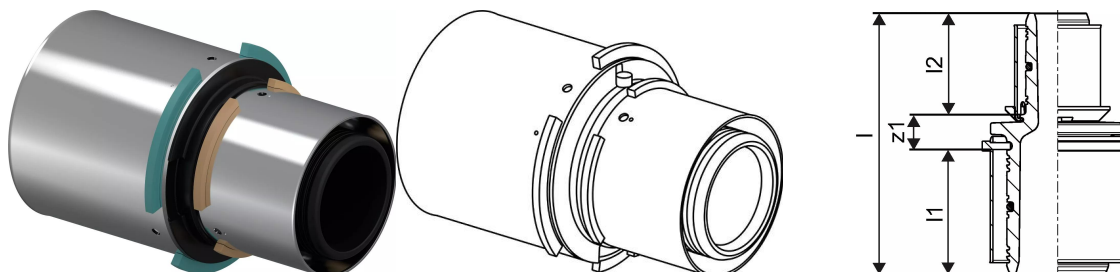

### About Uponor S-Press reducer PPSU

#### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press reducer PPSU 63-50

1032884

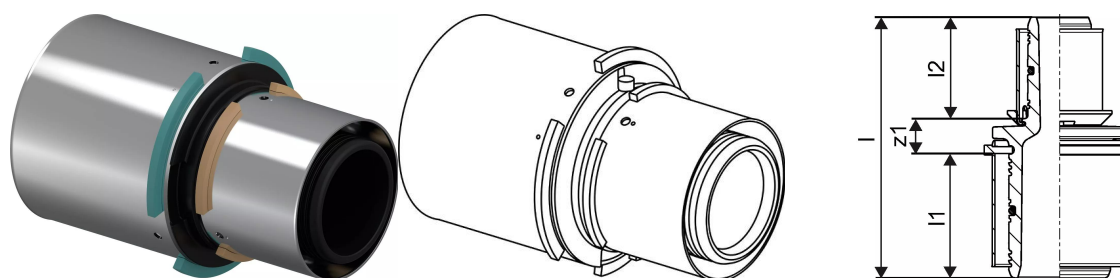

### Product code

Item no EAN	6414905220830
Item no GF	35001032884
Item no GTIN	06414905220830
Item no LVI	1720121
Item no NOBB	54939012
Item no NRF	5114366
Item no RSK	1899463
Item no VVS	087455163

### Dimensions

Item Unit Height	72
Item Unit Length	115
Item Unit Weight	0,249
Item Unit Width	72
Item_UOM	pce

### Measurements

LENGTH_L	114,8
Length (I1)	60,9
Length (I2)	37
z1	16,9

### Packaging

Packaging GTIN PL1	06414905281190
Packaging GTIN PL4	06414905281206
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	146
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00142569
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,296
Packaging Weight PL4	138,664
Packaging Width PL1	93
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)