
# Product data sheet



# GF Uponor S-Press tee reduced PPSU 75-50-75

## 1032894

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

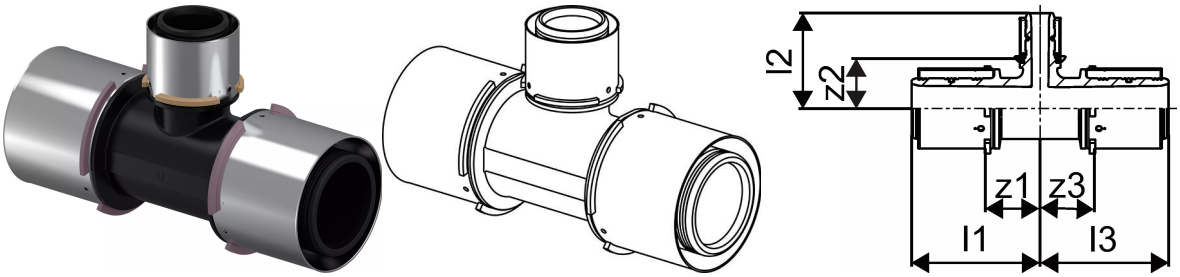


## About GF Uponor S-Press tee reduced PPSU

### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


### Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

# GF Uponor S-Press tee reduced PPSU 75-50-75

## 1032894

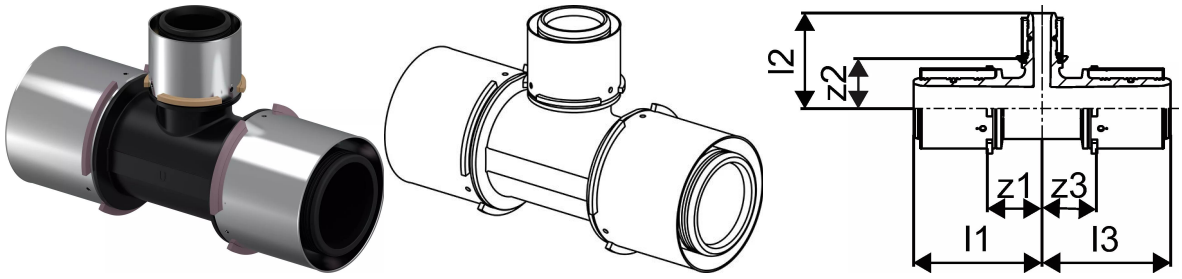


### Product code

| | |
|---|---|
| Item no EAN | 6414905220939 |
| Item no GF | 35001032894 |
| Item no GTIN | 06414905220939 |
| Item no LVI | 1720165 |
| Item no NOBB | 54939114 |
| Item no NRF | 5114377 |
| Item no RSK | 1808048 |
| Item no VVS | 087442172 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 84 |
| Item Unit Length | 215 |
| Item Unit Weight | 0,752 |
| Item Unit Width | 129 |
| Item_UOM | pce |

### Measurements

| | |
|---|---|
| Length (l1) | 107,5 |
| Length (l2) | 85,6 |
| Length (l3) | 107,5 |
| z1 | 46,6 |
| Z2 | 48,6 |
| Z3 | 46,6 |

### Status

| | |
|---|---|
| MTO (longer delivery times) | Item available on request, minimum lead time 2 weeks |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414905281411 |

| | |
|---|---|
| Packaging GTIN PL4 | 06414905281428 |
| Packaging Height PL1 | 105 |
| Packaging Height PL4 | 756 |
| Packaging Length PL1 | 224 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL4 | 150 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,0037632 |
| Packaging Volume PL4 | 0,72576 |
| Packaging Weight PL1 | 0,872 |
| Packaging Weight PL4 | 155,8 |
| Packaging Width PL1 | 160 |
| Packaging Width PL4 | 800 |

## Technical documents

Download documents here

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**



**Uponor UK**

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+