


## Uponor S-Press adapter male thread 75-R2 1/2"MT

**1032896**

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

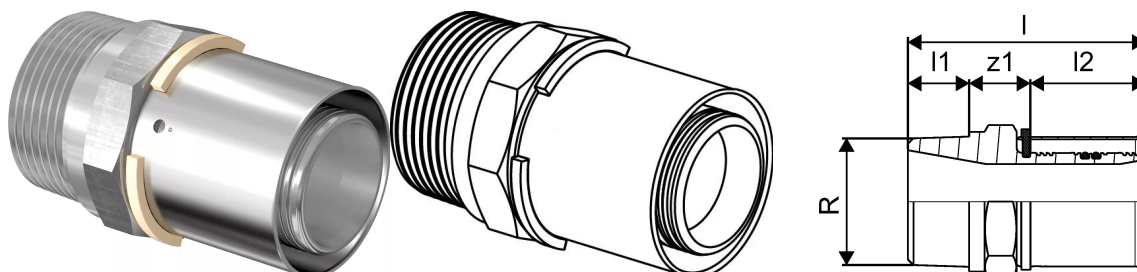

### About Uponor S-Press adapter male thread

#### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press adapter male thread 75-R2 1/2"MT

1032896

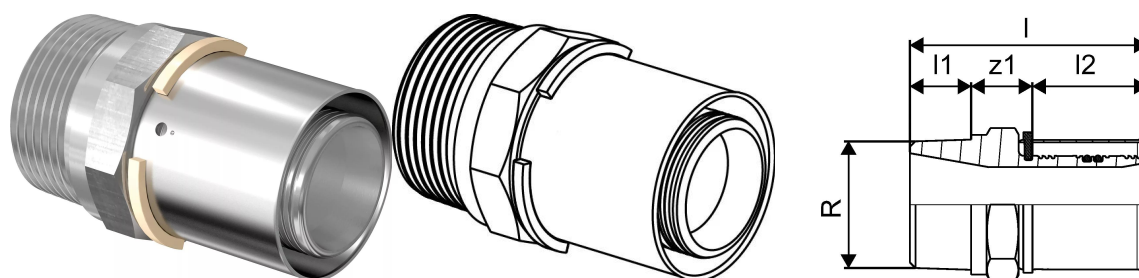

### Product code

Item no EAN	6414905220755
Item no GF	35001032896
Item no GTIN	06414905220755
Item no LVI	1720169
Item no NRF	5114379
Item no RSK	1899467
Item no VVS	045481075

### Dimensions

Item Unit Height	84
Item Unit Length	110
Item Unit Weight	1,012
Item Unit Width	84
Item_UOM	pce

### Measurements

LENGTH_L	109,86
Length (l1)	27
Length (l2)	60,6
Male_thread_R	2 1/2
Z Measurement d	75
z1	22

### Packaging

Packaging GTIN PL1	06414905523481
Packaging GTIN PL4	06414905523498
Packaging Height PL1	83
Packaging Height PL4	642
Packaging Length PL1	150
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	336
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0014193
Packaging Volume PL4	0,61632
Packaging Weight PL1	1,068
Packaging Weight PL4	382,848
Packaging Width PL1	114
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)