


Uponor S-Press PLUS elbow PPSU 20-20

1039930

- Material: PPSU

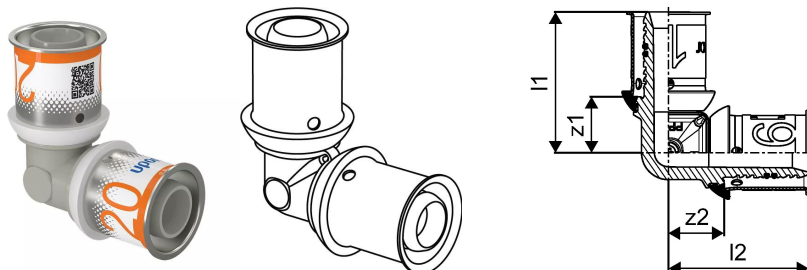

About Uponor S-Press PLUS elbow PPSU

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification



UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS elbow PPSU 20-20

1039930



Product code

Item no EAN	6414905228690
Item no GF	35001039930
Item no GTIN	06414905228690
Item no LVI	1720687
Item no NOBB	55171461
Item no NRF	5114382
Item no RSK	1896526
Item no VVS	087430120

Dimensions

Item Unit Height	49.85
Item Unit Length	49.85
Item Unit Weight	0,0272
Item Unit Width	25.7
Item_UOM	pce

Measurements

Length (l1)	37
Length (l2)	37
z1	15,7
z2	15,7

Packaging

Packaging GTIN PL1	06414905289431
Packaging GTIN PL3	06414905425495
Packaging GTIN PL4	06414905289455
Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176

Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Material (number) PL1	21
Packaging Material (number) PL3	20
Packaging Material (number) PL4	50
Packaging Material PL1	non-corrugated cardbone / cartone non corrugato
Packaging Material PL3	corrugated cardbone / cartone
Packaging Material PL4	europallet / europallet
Packaging Material (short) PL1	PAP
Packaging Material (short) PL3	PAP
Packaging Material (short) PL4	FOR
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	0,307
Packaging Weight PL3	2,716
Packaging Weight PL4	154,848
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	non-corrugated cardbone / cartone non corrugato
Recycling Text Block PL3	corrugated cardbone / cartone
Recycling Text Block PL4	europallet / europallet

Technical documents

Download documents here

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb