


## Uponor S-Press PLUS tee reducer PPSU 16-20-16

**1039948**

- Fixed stainless steel sleeve

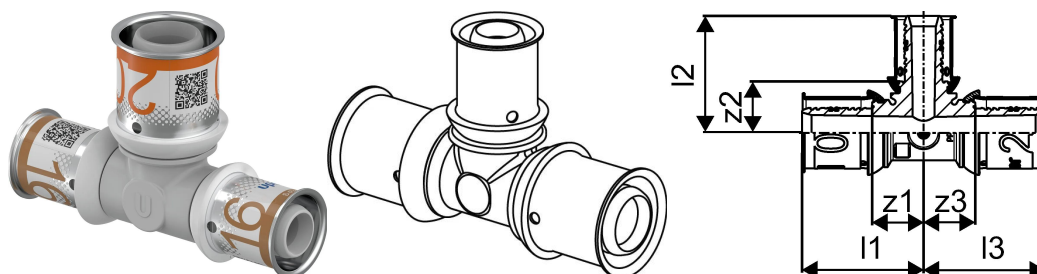

### About Uponor S-Press PLUS tee reducer PPSU

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS tee reducer PPSU 16-20-16

1039948

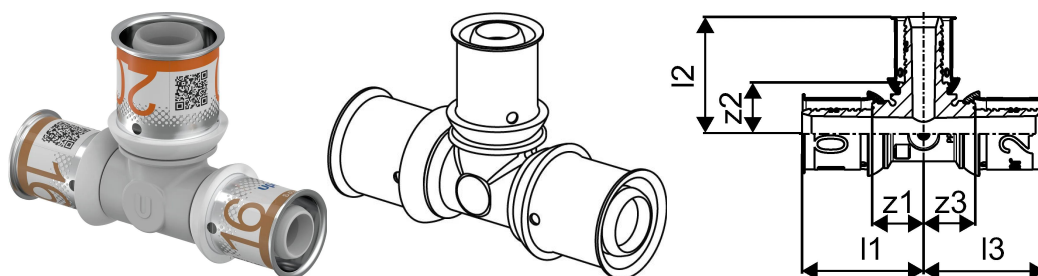

### Product code

Item no EAN	6414905228867
Item no GF	35001039948
Item no GTIN	06414905228867
Item no LVI	1720705
Item no NOBB	55171616
Item no NRF	5114402
Item no RSK	1807984
Item no VVS	087440207

### Dimensions

Item Unit Height	45.45
Item Unit Length	70
Item Unit Weight	0,02985
Item Unit Width	25.7
Item_UOM	pce

### Measurements

Length (l1)	35
Length (l2)	34,5
Length (l3)	35
z1	15,1
Z2	13,2
Z3	15,1

### Packaging

Packaging GTIN PL1	06414905478125
Packaging GTIN PL3	06414905635221
Packaging GTIN PL4	06414905478149
Packaging Height PL1	89
Packaging Height PL3	188

Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	0,357
Packaging Weight PL3	3,098
Packaging Weight PL4	173,704
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)